

READ THE FOLLOWING INSTRUCTIONS THOROUGHLY BEFORE USING TRANSMITTER. THIS TRANSMITTER MUST BE ADJUSTED SO THAT THE CODING SWITCHES MATCH THE CODING SWITCHES ON YOUR PRESENT OPERATING TRANSMITTER OR RECEIVER.

FCC REGULATION: THE DEVICE COMPLIES WITH FCC RULES PART 15. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE (2) THIS DEVICE MUST ACCEPT AN INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION. TRANSMITTER DISTANCE MAY VARY DUE TO CIRCUMSTANCES BEYOND OUR CONTROL.

INSTRUCTIONS FOR SINGLE ENTRY TRANSMITTER

1. REMOVE THE TRANSMITTER COVER

REMOVE THE ACCESS COVER FROM THE FRONT OF THE TRANSMITTER BY SLIDING THE COVER AWAY FROM THE TOP OF THE TRANSMITTER (FIGURE A). THIS WILL EXPOSE THE BATTERY AND THE DIP SWITCHES. THE CODE CAN NOW BE CHANGED USING A SMALL SCREWDRIVER.

2. SETTING THE CODE

YOU MAY SET YOUR TRANSMITTER TO ANY CODE YOU DESIRE, BUT BE SURE THE CODE YOU SET MATCHES ON BOTH YOUR TRANSMITTER AND RECEIVER.

THERE ARE 12 DIP SWITCHES ON YOUR TRANSMITTER EACH OF WHICH CAN BE PLACED IN TWO DIFFERENT POSITIONS (ON/OFF) THESE SHOULD BE PLACED IN THE EXACT SAME POSITION AS THE SWITCHES ON YOUR RECEIVER. **FOR SOME RECEIVERS WHICH HAVE ONLY 9 SWITCHES, IT WILL BE NECESSARY FOR YOU TO MOVE THE SMALL BLACK CODE TERMINAL TO CONNECT WITH PINS 2 & 3 THEREFORE FOR THE 9 DIP SWITCH MODEL RECEIVERS THE CODE SELECTION OF THE DIP SWITCHES ON YOUR TRANSMITTER 1 THRU 9 SHOULD BE SET EXACTLY THE SAME AS THOSE ON YOUR RECEIVER AND SWITCHES 10, 11, AND 12 ON THE TRANSMITTER SHOULD BE SET IN THE OFF POSITION.

DO NOT SET ALL SWITCHES IN THE SAME POSITION, SUCH AS ALL ON OR ALL OFF (FIGURE B) WARNING: NO OTHER ADJUSTMENTS SHOULD BE MADE INSIDE THE TRANSMITTER.

NOW THAT YOU HAVE SELECTED YOUR PERSONAL CODE, REPLACE THE TRANSMITTER COVER.

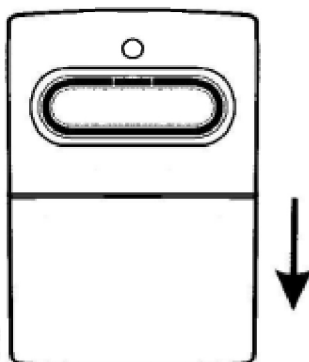


FIGURE A

TERMINAL BLOCK

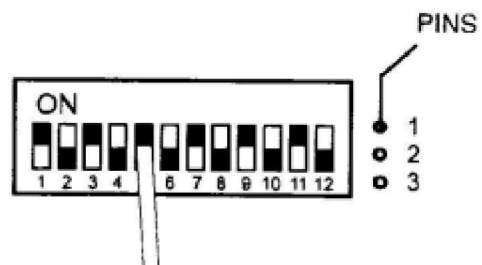


FIGURE B