

Universal 3 Channel Receiver

for gate operators & commercial door operators

Applications

- **Rolling Steel Doors**
- **Sectional Doors**
- **Motorized Gates**

The Miller Edge Model MWR03, 3 channel receiver, is designed to work with most gate and commercial door operators. This one receiver is capable of receiving signals from up to 3 different input devices.

The MWR03 operates on 12 or 24v AC/DC and can be configured for N.O. and N.C. devices. For added security, the receiver is a "Smart Receiver". It is capable of learning the transmitters 19,683 different codes without having to change any dip switch settings.

For distances over 100 feet, the MWR03 receiver's antenna is removable and, if needed, can be relocated for better reception.

The MWR03 is compatible with the Miller Edge MWTA02 (alarmed) or MWT02 high speed wireless edge transmitters and with your choice of Hand-Held or Mini Miller Edge Transmitters.

The MWR03 can receive signals from a Trailing Edge, Leading Edge, and a Hand Held Transmitter.



Model #MWR03 Receiver



MWKT01

MWHT01



MWTA02 Transmitter w/Alarm


MWT02 Transmitter





General Specifications

Model #MWR03 Receiver

Overall Dimensions: 1 3/16" H x 3 3/4" W x 4 13/16" L
Enclosure Material: Polycarbonate
Enclosure Color: Black
Response Time: < 60ms
Operating Temperature: -25°F to 140°F
Maximum Operating Distance: 100 Feet
Power: 12 or 24 volt AC or DC
Electrical Configuration: Optional N.O. or N.C.
Special Features: 19,683 programmable receiver codes
Pulse or Continuous Signal

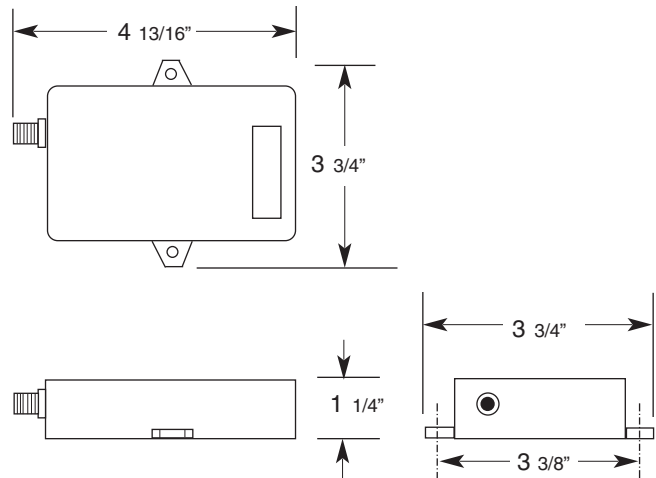

Hand-Held Transmitters

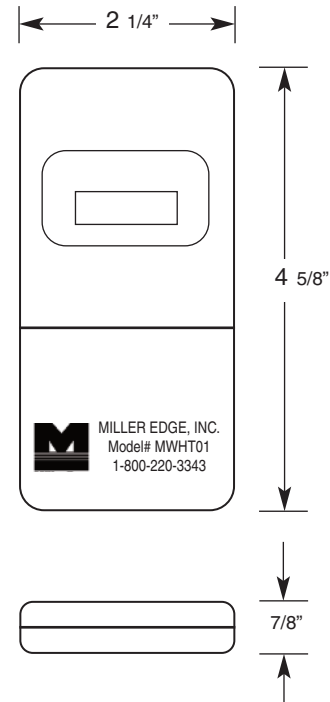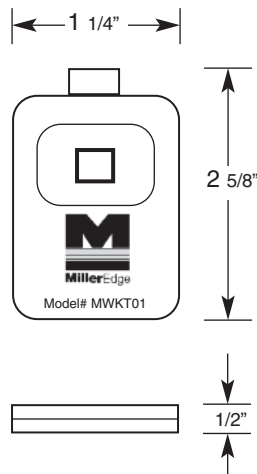

MWR03_Spec_20120717