


WELDON BARRIER GATE PLAN

Double Gate Configuration - Straight Support Design

Two 8' wide by 44" tall gate - hung between the posts - using Central Eye Hinges (Product Code #8312).

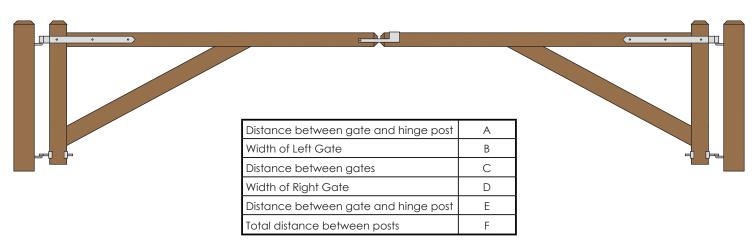

	HARDWA	ARE REQUIRED						
Finish Options Available	Galvanized Finish	Black Powder Coat over Galvanized Finish						
Plan Specified Required Hardware				Central Eye Hinge Advantages Opens both ways 100 degrees.				
Both Sets Include: (All fasteners are included with hardware)	2 of 8312-S242	2 of 8312-S24P	Incredible amount of adjustment.					
	two 24 inch double strap (8312-542 or 8312-54SP) two adjustable bottom gate fitting (8250-002 or 8250-00P)			peration.				
			vory shorig.					
	four 12" adjustable gate pin (8801-122 or 8801-12P)		Dimensions (feet and inches)					
Central Latch Option			Α	В	С	D	Е	F
Throw Over Gate Loop(shown)	4200-032	4200-03SP	4.5"	8'	1"	8'	4.5"	16' - 10''
Optional Gate Holdback						A		
	4270-122	4270-12SP	A means of keeping gates open					
	Lumb	er Required						
Posts	2 of 8' x 6" x 6" (usually dressed out at 5.5" x 5.5")							
Rails	6 of 8' x 1" x 5.5" 4 of 8' x 1" x 5.5" 2 of 8' x 1" x 5.5" (straight support design) or 4 of 8' x 1" x 5.5" (curved support design)			Rails, Stiles (uprights) and Diagonals made from full 1" thick lumber (commonly sold as decking lumber) or 1" rough cut lumber (4/4).				
Stiles								
Diagonals								
Filler Blocks	use off cuts from above							
	Fasteners Require	d for Gate Construction						
2 of FP-WeldonBarr. - Fastener Pack for Weldon Barrier Gate Build (Includes 40 of 1.75" wood screws, 2 of 3/8" dowel rod and 9 of 3.5" HDG carriage bolts, nuts and washers)								

