


Double Track Construction Detail

Splice Detail

2" Long Fillet Weld Every 14" Along Top of the Track.

1/2" x 6" x 24" Splice Plate, Weld All Sides

2" Long Stitch Weld Every 14" Along the Bottom

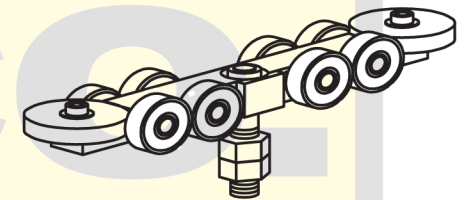

Truck Assembly With sealed roller bearings

Default Specifications

- Uprights: 2" S.Q. .125 Wall
- Diagonals: 1-1/4" S.Q. .125 Wall
- Top Track: 6" x 3-1/4"
- Bottom Track: 3-1/4" x 3-1/4"
- All Material 6061-T6 Extruded

Project:

34'-35' Aluminum Slide Gate W/Barb

Approved By/Date

Revision NO.

Drawing NO.

Drawn By:

Effective Date

