
## DOUBLE CAPE COD RAIL GATES (4 FOOT & 10 FOOT WIDE 46" HIGH GATES WITH 74" STILE) REAR EYE HINGES (Product Codes #8324) GATE HUNG BETWEEN POSTS



	<del>"</del>	Hardware Required						1	
	Galvanized Finish	Black Powder Coat over Galvanized Finish	R	Rear Eye Hinge Advantages					
Hinge Sets	1 of 8324-122 & 1 of 8324-S242	1 of 8324-12P and 1 of 8324-S24P		Opens 180 degrees					
fasteners included	Two Sets Includes			Incredible amount of adjustment					
with hardware	two 12" double strap (8324-122 or 8324-12SP) & two 24" double strap (8324-242 or 8324-24SP)			Easy operation & Very Strong					
	four mounting plate with 8" adjustable threaded pins(8256-342 or 8256-34P)			Minimal distance between					
Cane Bolt (Vertical)	1 or 2 of 5000-242*	1 or 2 of 5000-24SP*		gate and post					
Central Latch Options				Dimensions (feet and inches)					
Central Later Options		Α	В	С	D	Е	F		
Throw Over Gate Loop	4200-032	4200-03SP	1"	4'	1"	10'	1"	14' 3"	
Cane Bolt and Keep	5000-122 plus 5000-002	5000-12SP plus 5000-00SP	1"	4'	1"	10'	1"	14' 3"	
Lumber Required									
Posts 2 of 10' x 6" x6" (usually dressed out at 5.5" x 5.5")									
		thick by 5.5" wide lumber (commonly stocked decking mate	rial or ı	ough	cut lui	mber)			
ails 2 of 8' x 1" x 5.5" and 4 of 10" x 1" x 5.5"									
Stiles	6 of 8' x 1" x 5.5"								
Diagonals	2 of 8' x 1" x 5.5" and 2 of 12' x 1" x 5.5"								
Filler blocks for bottom hinge 1 of 12' x 1" x 5.5" and 2 of 14' x 1" x 5.5" (Parts E,F,G and H on Plan Layout)									
		Fasteners Required							
Approximately 100 of 1.75" x #	#8 wood screws (stainless preferred)								
<u> </u>	(hot dipped galvanized or stainless stee								
		than thickness of gate post (preferred) or 20 of 3/8" lag bold							
*One 24" Cane Bol	t (5000-242 or 5000-24SP) is required f	for central stability. Two are needed if you require a means	of kee	ping tl	ne gat	es ope	n.		

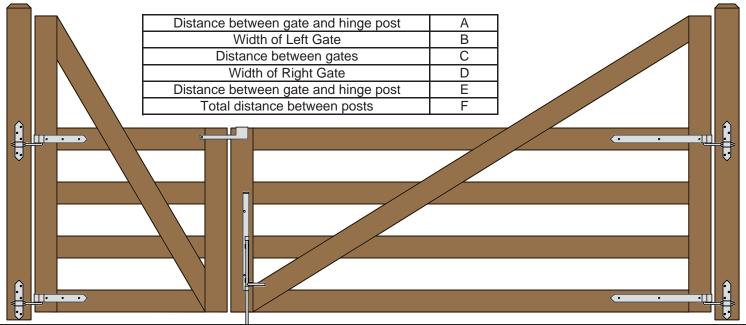