
DOUBLE CAPE COD RAIL GATE (TWO 6 FOOT WIDE 46" HIGH GATES)

CENTRAL EYE HINGE	S (Product Code	es #8312) GATE H	UNG BETWEEN POSTS



		Hardware Required								
	Galvanized Finish	Black Powder Coat over Galvanized Finish	Ce	Central Eye Hinge Advantages						
Hinge Sets	2 of 8312-S182	2 of 8312-S18P								
fasteners included		Two Sets Includes			Opens both ways 100 degrees					
with hardware	two 18 inch double strap (8312-482 or 8312-48SP)			Incredible amount of adjustment						
	two adjustable bottom gate fitting (8250-002 or 8250-00P)			Easy operation						
	four 12" adjustable gate pin (8800-122 or 8800-12P)		Very strong							
Cane Bolt (Vertical)	1 or 2 of 5000-242*	1 or 2 of 5000-24SP*								
Central Latch Options		Dimensions (feet and inches)								
		ptions	Α	В	С	D	Е	F		
Throw Over Gate Loop	4200-032	4200-03SP	4.5"	6'	1"	6'	4.5"	12' 10"		
Cane Bolt and Keep	5000-122 plus 5000-002	5000-12SP plus 5000-00SP	4.5"	6'	1"	6'	4.5"	12' 10"		
		Lumber Required								
Posts	2 of 10' x 6" x6" (usually dressed or	ut at 5.5" x 5.5")								
	1 0 7	thick by 5.5" wide lumber (commonly stocked decking m	aterial or	rougl	n cut lu	umbei	.)			
Rails	4 of 12' x 1" x 5.5"									
Stiles	6 of 8' x 1" x 5.5"									
Diagonals	4 of 8' x 1" x 5.5"									
Filler Blocks	2 of 14' x 1" x 5.5" (Parts E,F, and G	2 of 14' x 1" x 5.5" (Parts E,F, and G on Plan Layout)								
		Fasteners Required								
	#8 wood screws (stainless preferred)									
	s (hot dipped galvanized or stainless stee									
*One 24" Cane B	olt (5000-242 or 5000-24SP) is required	for central stability. Two are needed if you require a mea	ans of ke	eping	the ga	ates o	pen.			
		Hoover Fence Company		•	•			•		

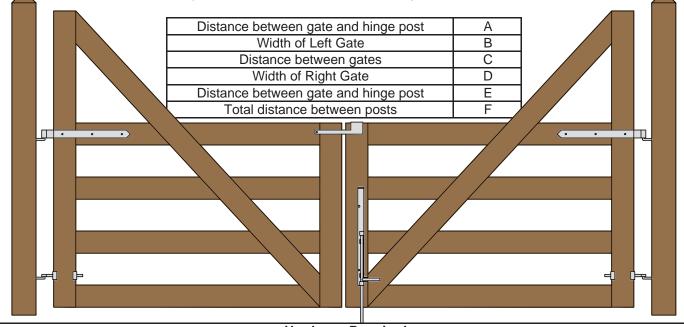