
DOUBLE CAPE COD RAIL GATES (TWO 8 FOOT WIDE 46" HIGH GATES WITH 74" STILE) REAR EYE HINGES (Product Codes #8324) GATE HUNG BETWEEN POSTS

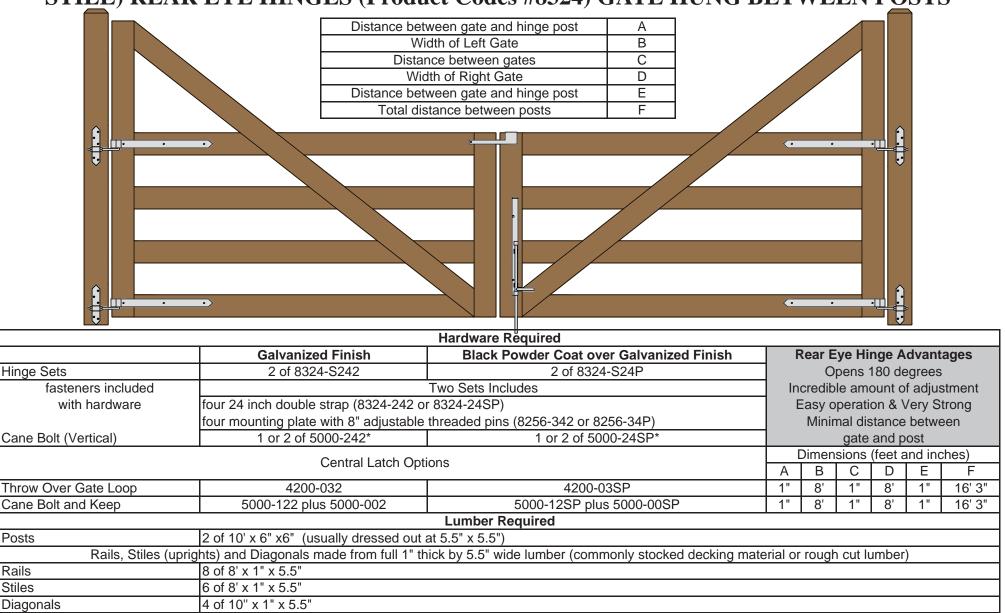

Filler blocks for bottom hinge 4 of 12' x 1" x 5.5" (Parts E,F,G and H on Plan Layout)

Fasteners Required

Approximately 100 of 1.75" x #8 wood screws (stainless preferred)

Posts

Rails Stiles

32 of 3.5" x 3/8" carriage bolts (hot dipped galvanized or stainless steel), nuts, and washers

Mounting Plate Fasteners - 20 of 3/8" carriage bolts that are 1" longer than thickness of gate post (preferred) or 20 of 3/8" lag bolts (minimum of 4" long)

*One 24" Cane Bolt (5000-242 or 5000-24SP) is required for central stability. Two are needed if you require a means of keeping the gates open.

Hoover Fence Company

Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.

For a complete listing of our free gate plans and gate layouts visit hooverfence.com.

