
DOUBLE "V" RAIL GATE PLANDouble Gate Configuration - Tapered Top Rail

(4' & 10' FOOT WIDE 48" HIGH GATES) REAR EYE HINGES (Product Codes #8324) GATE HUNG BETWEEN POSTS

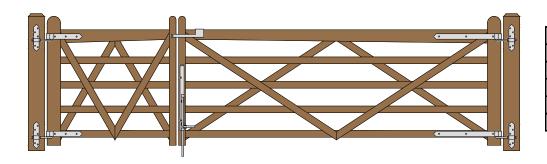


Distance between gate and hinge post	А
Width of Left Gate	В
Distance between gates	С
Width of Right Gate	D
Distance between gate and hinge post	E
Total distance between posts	F

		Hardware Required							
	Galvanized Finish	Black Powder Coat over Galvanized Finish	R	Rear Eye Hinge Advantages					
Hinge Sets	1 of 8324-S122 and 1 of 8324-S242	1 of 8324-S12P and 1 of 8324-S24P	Opens 180 degrees						
Fasteners included with double strap	Two Sets Includes			Incredible amount of adjustment					
hinges - Mounting plate fasteners sold	two 12" double strap (8324-122 or 8324-12SP) & two 24" double strap(8324-242 or 8324-24SP)			Easy operation & Very Strong					
seperately**	four mounting plate with 8" adjustable threaded pins(8256-342 or 8256-34P)			Minimal distance between					
Cane Bolt (Vertical)	1 or 2 of 5000-242*	1 or 2 of 5000-24SP*		gate and post					
Fasteners included with latches	Central Latch Options		Dimensions (feet and inches)						
		Central Laten Options		В	С	D	Ε	F	
Throw Over Gate Loop	4200-032	4200-03SP	1"	4'	1"	10'	1"	14' 3"	
Slide Bolt Latch (Flush/ Jamb Mount	5002-L122	5002-L12SP	1"	4'	1"	10'	1"	14' 3"	
Lumber Required									
Posts 2 of 8' x 6" x6" (usually dressed out at 5.5" x 5.5")									
Rails, Stiles (uprights) and Diagonals made from full 1" thick by 5.5" wide lumber (commonly stocked decking material or rough cut lumber)									
Top Rails (tapered)	2 of 8' x 1" x 5.5" (cut to 3 x 5.5" x 4') and 3 of 10' x 1" x 5.5" (cut to 3 x 5.5" x 10')								
Rails	1 of 8' x 1" x 5.5" (cut to 4 x 2.5" x 4') and 2 of 10' x 1" x 5.5" (cut to 4 x 2.5" x 10')								
Stiles	3 of 8' x 1" x 5.5" (4 x 5" x 4' for hinge sides and 4 x 2.5" x 4' for latch sides)								
Diagonals	1 of 8' x 1" x 5.5" (cut to 2.5" x 4') for the 4' gate and 1 of 12' x 1" x 5.5" (cut to 2.5" x 6') for the 10' gate								
Filler blocks for bottom hinge	use off cuts from other pieces for all filler blocks								
		Fasteners Required							
		udes: 14 of 3.5" & 15 of 2.5" carriage bolts, washers and nut					ews)		
		than thickness of gate post (preferred) or 20 of 3/8" lag bolts				ong)			
*One 24" Cane Bolt (5000-242 o	r 5000-24SP) is required for central stal	bility. Two are needed if you require a means of keeping th	e gate	s ope	٦.				


SNUG COTTAGE HARDWARE

Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.

For a complete listing of our free gate plans and gate layouts visit hooverfence.com.



4' DOUBLE 'V' GATE




GATE DIMENSIONS

PROPERTY OF:


SNUG COTTAGE HARDWARE LLC MARYSVILLE MI. 48040 PRODUCT DESCRIPTION:

4' DOUBLE 'V' GATE


ALL DIMENSIONS ±0.125"



FIRST LAYER



SECOND LAYER



THIRD LAYER

BUILDING STEPS

