
DOUBLE MAINE BOARD RAIL GATE (4 FOOT & 8 FOOT WIDE 46" HIGH GATES) REAR EYE HINGES (Product Codes #8324) GATE HUNG BETWEEN POSTS

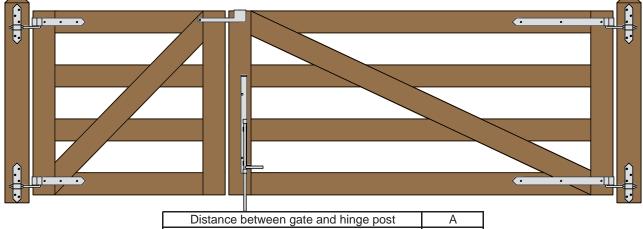

| Distance between gate and hinge post | A |
|--------------------------------------|---|
| Width of Left Gate | В |
| Distance between gates | С |
| Width of Right Gate | D |
| Distance between gate and hinge post | E |
| Total distance between posts | F |

| | | Hardware Required | | | | | | |
|----------------------------------|--|--|---------------------------------|--|----------|-------|-----|--------|
| | Galvanized Finish | Black Powder Coat over Galvanized Finish | R | Rear Eye Hinge Advantages | | | | ages |
| Hinge Sets | 1 of 8324-122 & 1 of 8324-S242 | 1 of 8324-12P and 1 of 8324-S24P | | Opens 180 degrees | | | | |
| fasteners included | | Two Sets Includes | Incredible amount of adjustment | | | | | |
| with hardware | two 12" double strap (8324-122 or 832- four mounting plate with 8" adjustable t | 4-12SP) & two 24" double strap (8324-242 or 8324-24SP) threaded pins(8256-342 or 8256-34P) | E | Easy operation & Very Strong Minimal distance between | | | | |
| Cane Bolt (Vertical) | 1 or 2 of 5000-242* | 1 or 2 of 5000-24SP* | | gate and post | | | | |
| Control Lotoh Ontiona | | | Dimensions (feet and inches) | | | | | |
| | Central Latch Options | | Α | В | С | D | E | F |
| Throw Over Gate Loop | 4200-032 | 4200-03SP | 1" | 4' | 1" | 8' | 1" | 12' 3" |
| Cane Bolt and Keep | 5000-122 plus 5000-002 | 5000-12SP plus 5000-00SP | 1" | 4' | 1" | 8' | 1" | 12' 3" |
| | · · · · · · | Lumber Required | • | • | | | | - |
| Posts | 2 of 8' x 6" x6" (usually dressed out at | 5.5" x 5.5") | | | | | | |
| Rails, Stiles (up | prights) and Diagonals made from full 1" | thick by 5.5" wide lumber (commonly stocked decking mate | erial or | rough | cut lui | mber) | | |
| Rails | 3 of 8' x 1" x 5.5" and 6 of 8' x 1" x 5.5" | | | | | | | |
| Stiles | 4 of 8' x 1" x 5.5" | | | | | | | |
| Diagonals | 1 of 10' x 1" x 5.5" and 2 of 8' x 1" x 5.5" | | | | | | | |
| Filler blocks for bottom hinge | 1 of 8' x 1" x 5.5" | | | | | | | |
| | | Fasteners Required | | | | | | |
| Approximately 100 of 1.75" x | #8 wood screws (stainless preferred) | | | | | | | |
| 24 of 3.5" x 3/8" carriage bolts | s (hot dipped galvanized or stainless stee | el), nuts, and washers | | | | | | |
| | | than thickness of gate post (preferred) or 20 of 3/8" lag bo | lts (mini | mum | of 4" lo | ong) | | |
| | | or central stability. Two are needed if you require a mean | | | | | ən. | |
| | | Hoover Fonce Company | | | 0 | 1 | | |

Hoover Fence Company

Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.

For a complete listing of our free gate plans and gate layouts visit hooverfence.com.

