

TRU-CLOSE®

ADJUSTABLE, SELF-CLOSING GATE HINGES

'TCP' MODEL Fitting Instructions

TRU•CLOSE hinges are injection-molded from tough, reinforced polymers that help overcome the traditional hinge problems of rust, binding, sag and staining.

These hinges are for lightweight gates only.


PROCEDURE:

- These hinges are designed for gates weighing up to 22lb/10kg based on a maximum gate size of 5'Hx3'W (1524Hx915Wmm) with maximum spacing between hinges.
- A 'Gate Stop' must be in place to prevent the gate/hinges closing past the line of the fence.
- Install the hinges using "countersunk" style bolts or screws suitable for your gate and fence materials.
- Always keep the 'head' end of the hinge pin as the top of the hinge. Remove all other hinges or closing devices before installing TRU•CLOSE hinges.
- At all times, ensure hinges are kept level and vertically aligned.


Note:

- Do not lubricate or disassemble hinges
- Always use the two hinges on any gate

Locate hinge so that the *inside* of the hinge pin head aligns with the *outside* of the fence/gate

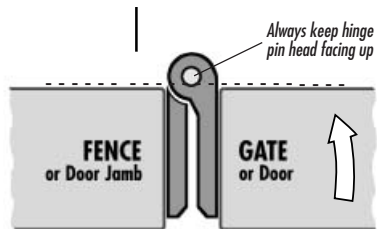

BUTT-FIXING



FACE-FIXING

Made in  Australia

d&d technologies

AUSTRALIA: 192 Harbord Rd, Brookvale NSW 2100
USA: 7731 Woodwind Drive, Huntington Beach, CA 92647

WARRANTY & LIMITATION OF LIABILITY

The hinges will operate properly and warranty is valid only if installed in accordance with the instructions and specifications shown. If hinges malfunction within two years of date of purchase, the manufacturer will repair or replace units at its discretion unless such malfunction is caused by incorrect installation or misuse of the hinges. Ensure hinges are kept free of ice, sand and debris for effective operation.

Safety gates? For best results on safety gates (e.g. swimming pools) ask for TRU•CLOSE tension-adjustable hinges ('TCA' or 'TCHD' ranges).