

**DOUBLE CAPE COD RAIL GATE
(4 FOOT & 5 FOOT WIDE 46" HIGH
GATES)
CENTRAL EYE HINGES
(Product Codes #8312)
GATE HUNG BETWEEN POSTS**


| | |
|--------------------------------------|---|
| Distance between gate and hinge post | A |
| Width of Left Gate | B |
| Distance between gates | C |
| Width of Right Gate | D |
| Distance between gate and hinge post | E |
| Total distance between posts | F |

| Hardware Required | | | | | | | | |
|--|---|---|---|----|----|----|------|--------|
| | Galvanized Finish | Black Powder Coat over Galvanized Finish | Central Eye Hinge Advantages | | | | | |
| Hinge Sets | 1 of 8312-S122 and 1 of 8312-S182 | 1 of 8312-S12P and 1 of 8312-S18P | Opens both ways 100 degrees Incredible amount of adjustment Easy operation Very strong | | | | | |
| fasteners included with hardware | Two Sets Includes | | | | | | | |
| | one 12" double strap (8312-422 or 8312-42SP) & 1 one 18" double strap (8312-482 or 8312-48SP) two adjustable bottom gate fitting (8250-002 or 8250-00P) four 12" adjustable gate pin (8800-122 or 8800-12P) | | | | | | | |
| Cane Bolt (Vertical) | 1 or 2 of 5000-242* | 1 or 2 of 5000-24SP* | | | | | | |
| Central Latch Options | | | Dimensions (feet and inches) | | | | | |
| | | | A | B | C | D | E | F |
| Throw Over Gate Loop | 4200-032 | 4200-03SP | 4.5" | 4' | 1" | 5' | 4.5" | 9' 10" |
| Cane Bolt and Keep | 5000-122 plus 5000-002 | 5000-12SP plus 5000-00SP | 4.5" | 4' | 1" | 5' | 4.5" | 9' 10" |
| Lumber Required | | | | | | | | |
| Posts | 2 of 10' x 6" x 6" (usually dressed out at 5.5" x 5.5") | | | | | | | |
| | Rails, Stiles (uprights) and Diagonals made from full 1" thick by 5.5" wide lumber (commonly stocked decking material or rough cut lumber) | | | | | | | |
| Rails | 2 of 8' x 1" x 5.5" and 2 of 10' x 1" x 5.5" | | | | | | | |
| Stiles | 6 of 8' x 1" x 5.5" | | | | | | | |
| Diagonals | 4 of 8' x 1" x 5.5" | | | | | | | |
| Filler Blocks | 1 of 10' x 1" x 5.5" and 1 of 12' x 1" x 5.5"- (Parts E,F, and G on Plan Layout) | | | | | | | |
| Fasteners Required | | | | | | | | |
| Approximately 100 of 1.75" x #8 wood screws (stainless preferred) | | | | | | | | |
| 28 of 3.5" x 3/8" carriage bolts (hot dipped galvanized or stainless steel), nuts, and washers | | | | | | | | |
| *One 24" Cane Bolt (5000-242 or 5000-24SP) is required for central stability. Two are needed if you require a means of keeping the gates open. | | | | | | | | |


Hoover Fence Company

Download includes this materials list, component cutting and layout sheet, tips on installing gate posts, and detailed instructions.




For a complete listing of our free gate plans and gate layouts visit hooverfence.com.

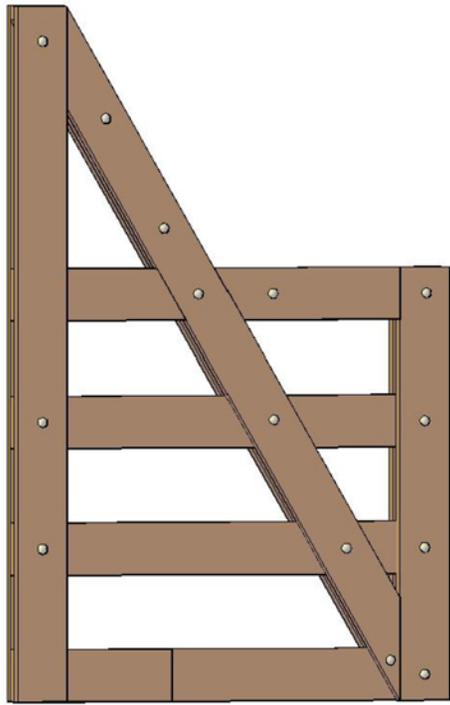





FLAT FRONTAL VIEW




THREE LAYERS

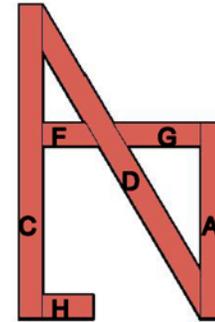


COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)

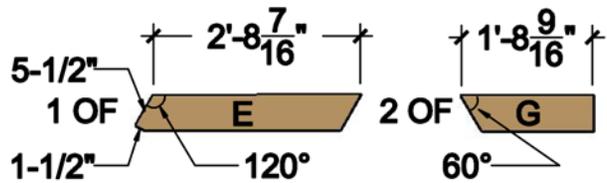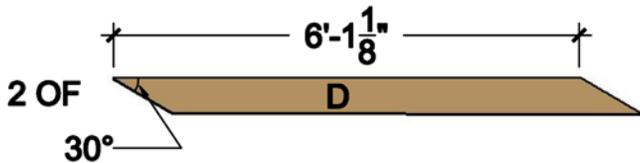




Hoover Fence Company
4' Cape Cod Board Gate

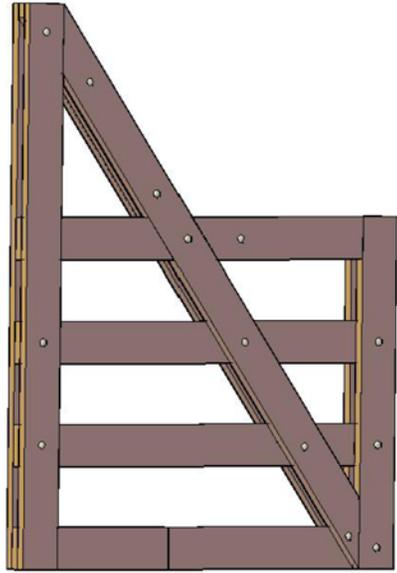


FLAT FRONTAL VIEW



THREE LAYERS



COMPONENTS (FULL 1" THICK x 5-1/2" WIDE)

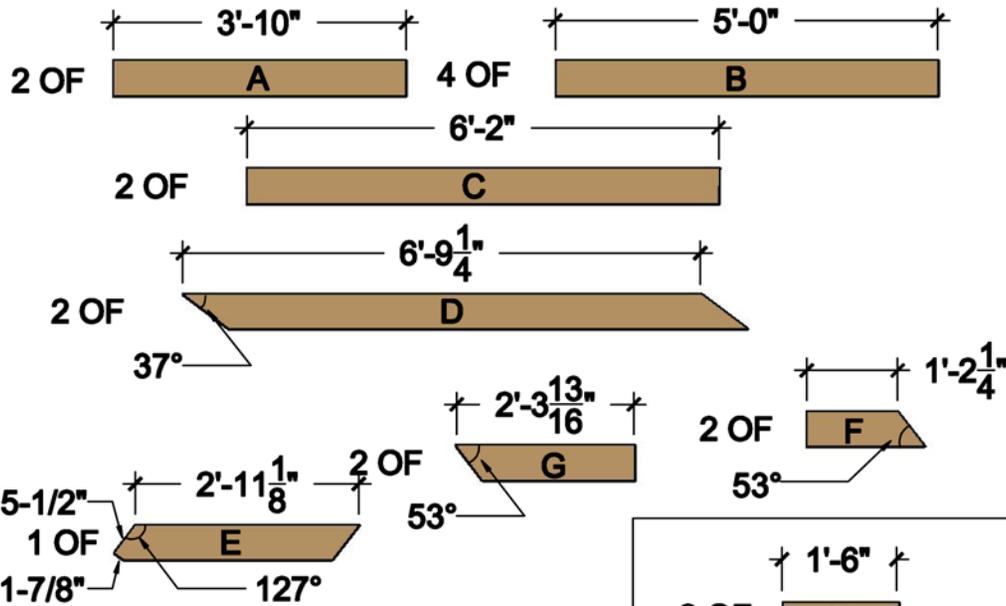

2 OF $1'-6"$ H
For Rear Eye Hinge Only

Hoover Fence Company
5' Cape Cod Board Gate