

CSW200UL SWING GATE OPERATOR

SECTION 32 31 00



KEY FEATURES

REMOTE CONTROL ACCESS	Security+ 2.0® 3-channel receiver will handle up to 50 remote controls (unlimited remotes with 811LMX/813LMX)
INTERNET CONNECTIVITY	MyQ® technology monitors and controls the operator through the MyQ app
MONITORED SAFETY INPUTS	6 inputs (main and expansion board)
DIAGNOSTIC DISPLAY	LED diagnostic display
WIRELESS DUAL-GATE COMMUNICATION	Eliminates expensive conduit costs and unsightly driveway scars
LIMIT SETTING	Mechanical
DUAL-GATE CONTROL	Bi-part delay or synchronized close
PROGRAMMABLE AUXILIARY RELAYS	Easily add additional features, such as warning lights/alarms
UNAUTHORIZED ACCESS PREVENTION	Can be programmed with anti-tailgate or quick close capabilities
HOMELINK® COMPATIBLE	Version 4 and higher

SPECIFICATIONS

OPERATOR SPEED	90-degree opening in 15 seconds
POWER	120VAC single phase
ACCESSORY POWER	24VDC, 500mA output
OPERATOR WEIGHT	175 lbs.
WARRANTY	5 years commercial, 7 years residential
TEMPERATURE SPECIFICATIONS	Without heater: -4°F (-20°C) to 140°F (60°C); with optional heater: -40°F (-40°C) to 140°F (60°C)
UL USAGE CLASSIFICATION	UL 325 & UL 991 listed – class I, II, III and IV

CONSTRUCTION

MOTOR	High-temperature (1/2 HP or 1 HP) AC motor with class H insulation for high cycle, high-temperature applications
OPERATOR DUTY RATING	Continuous duty
CHASSIS/FRAME	Constructed with 1/4 in. black powder-coated steel for rust prevention
GEAR REDUCTION	900:1 worm gear reducer in synthetic oil bath
COVER	High-density, 2-piece UV-resistant polyethylene cover
RECOMMENDED CAPACITIES	1/2 HP – rated for gates up to 18 ft. in length or weighing up to 1,600 lbs. 1 HP – rated for gates up to 22 ft. in length or weighing up to 2,000 lbs.


DATA SHEET
SWING GATE OPERATOR

LiftMaster®

CSW200UL SWING GATE OPERATOR

SECTION 32 31 00


DIMENSIONS

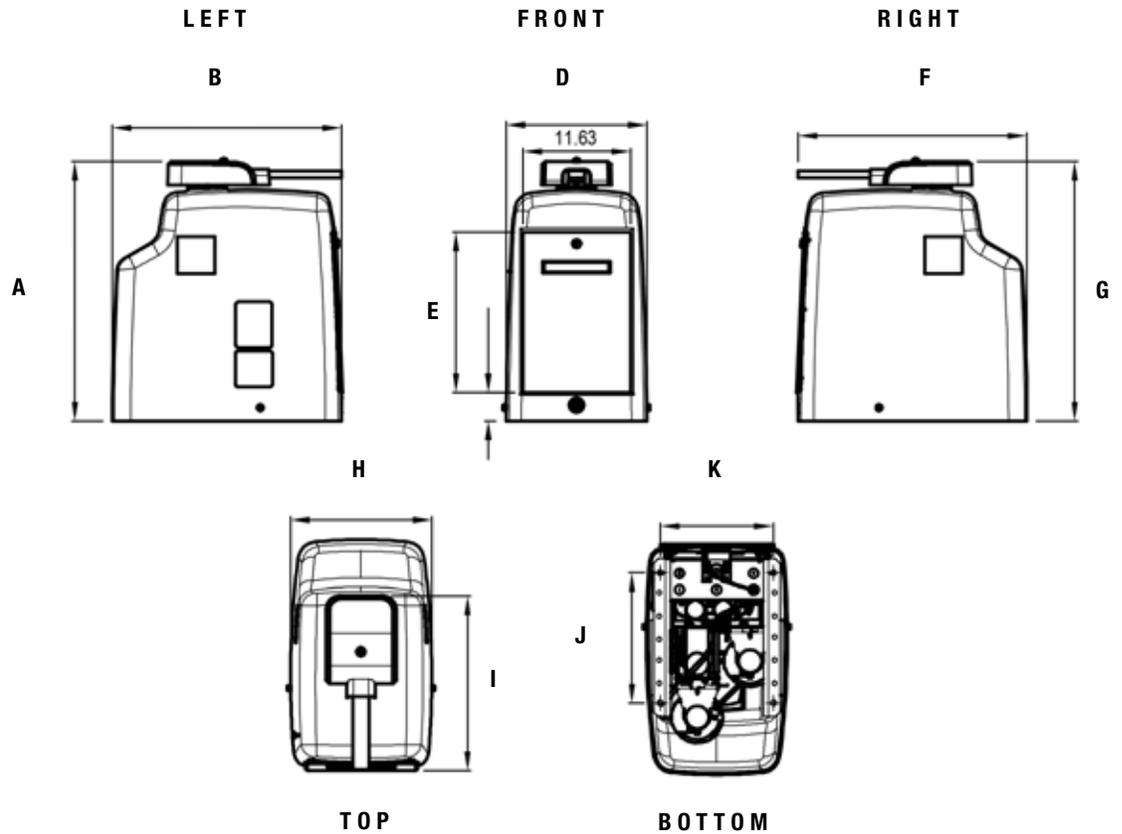

	1/2 HP	1 HP
A	28.04	27.99
B	19.59	24.75
C	4.43	3.08
D	16.37	15.20
E	N/A	17.29
F	19.59	24.75
G	28.04	27.99
H	12.20	15.20
I	28.04	18.77
J	14.00	14.00
K	12.20	12.20

CAPACITY

RECOMMENDED CAPACITY 1/2 HP

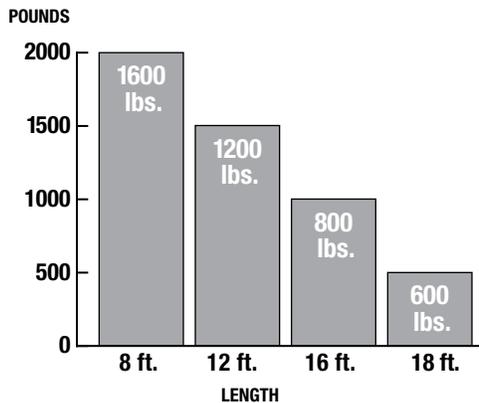

RECOMMENDED CAPACITY 1 HP (SHOWN)

