

# Endless Fencing Solutions

Ease the monotony of  
Chainlink & Vinyl fencing



# ***Speed is the only requirement***

- *Exclusive Hog Ring Pliers and Staples*
- *Fencing Pliers • Chainlink Fencing Staplers*
- *Chainlink Fence Tensioners*
- *Vinyl Cutting Saw Blades*
- *Notchers and Wrenches*



# Commercial Grade Chainlink Hog Ring Pliers and Staples



Commercial grade Hog Ring Pliers with Magazine installs 9-Ga. (3.8 mm) collated aluminum rings or exclusive 9-Ga. (3.8 mm) collated steel rings. Easily secures 7-Ga. (4.5 mm) wire to 9-Ga. (3.8 mm) chain link fence.

Designed to address the most stringent regulatory codes, this commercial grade hog ring pliers ensures uninterrupted operation to quickly install extra secure Malco 9 Ga. (3.8 mm) collated aluminum rings or exclusive 9 Ga. (3.8 mm) collated steel rings anywhere along a chain link fence. Long handles save time and effort with plenty of leverage and reach. The 25-count strips of collated rings can be loaded into the pliers' symmetrical magazine from either direction. A plunger feed automatically sets up each ring. There is no need to manually rotate the magazine out of the way as the pliers' clinching mechanism brings the ring forward of the nose for easy access to tension wire and fence. The magazine easily folds down for safe and easy storage of tool.

- Easy loading, auto-feed magazine.
- Long handles for extra leverage and reach.
- Easy access to tension wire and fence.
- Use with HRA5 Aluminum Rings or HRS5 Steel Rings

## HRP5

## HRA5

**Aluminum Hog Rings, 9-ga. (3.8 mm)**  
**Lightweight for Fast Installation**

- Unique overlap clinch is twice as strong as closest alternative.
- 6061-T94 or 5052-H38 Alloy
- 25-piece loading strips with no sharp points are safe and easy to load.
- One 500 pack secures 1000 feet (305 m) of tension wire spaced at 24 in. (61 cm) intervals.

## HRS5

**Galvanized Steel Hog Rings, 9-ga. (3.8 mm)**  
**Strong and Weather Resistant!**

- Unique overlap clinch is twice as strong as closest alternative.
- Class 3 Coating Per ASTM A641
- 25-piece loading strips with no sharp points are safe and easy to load.
- The only collated 9-Ga. steel hog rings on the market.
- One 500 pack secures 1000 feet (305 m) of tension wire spaced at 24 in. (61 cm) intervals.



Collapsible magazine for easy storage!




Easy to Load and Lock

Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Weight lbs. (oz.)	For Tools	Material	Qty.	Crown in. (mm)	Opening in. (mm)	Inside Dia. in (mm)	Thickness Gauge (mm)
HRP5	Hog Ring Pliers w / Mag.	HRA5 / HRS5	20 (50.8)	2.9 (1.32)	—	—	—	—	—	—	—
HRS5	Hog Ring Staples				HRP5	Galvanized Steel	500	1-7/16 (37)	5/8 (16)	7/16 (11)	9 (3.8)
HRA5	Hog Ring Staples				HRP5	Aluminum Alloy	500	1-7/16 (37)	5/8 (16)	7/16 (11)	9 (3.8)




## Chain link fence stapler

- Lightweight with easy spring actuated action
- Comfortable rubber-gripped handle
- Stop guide ensures proper hold on the hog ring
- 2 built-in wire cutters with 11-gauge (3 mm) capacity
- Compatible with HR1 (5/8 in., 16 mm) and HR2 (3/4 in., 20 mm) hog ring staples.

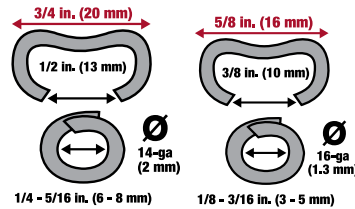


## Chain link fence stapler with magazine

- 50-staple magazine capacity
- Easy removal of magazine for less storage space
- 2 built-in wire cutters with 11-gauge (3 mm) capacity
- Compatible with HR2 (3/4 in., 20 mm) hog ring staples



## Chain link fence stapler with magazine

- Easy fit screw for fast removal of magazine (less storage space)
- 50-staple magazine capacity
- Compatible with HR4 (1-3/16 in., 30 mm) hog ring staples

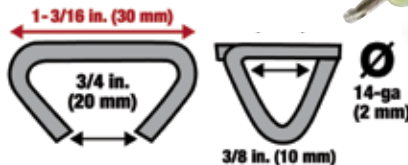

Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Weight oz. (g)	For Tools	Material	Qty.	Crown in. (mm)	Opening in. (mm)	Inside Dia. in (mm)	Thickness Gauge (mm)
<b>HRP1</b>	Hog Ring Pliers	HR1 / HR2	7 (178)	7 (198)	—	—	—	—	—	—	—
<b>HRP2</b>	Hog Ring Pliers with Magazine	HR2	7 (178)	15 (425)	—	—	—	—	—	—	—
<b>HRP4</b>	Hog Ring Pliers with Magazine	HR4	7-3/8 (187)	16 (454)	—	—	—	—	—	—	—
<b>HR1</b>	Hog Ring Staples				HRP1	Galvanized Steel	1250	5/8 (16)	3/8 (10)	1/8-3/16 (3-5)	16 (1.3)
<b>HR1X</b>	Hog Ring Staples				HRP1	Galvanized Steel	250	5/8 (16)	3/8 (10)	1/8-3/16 (3-5)	16 (1.3)
<b>HR2</b>	Hog Ring Staples				HRP1/HRP2	Galvanized Steel	1000	3/4 (20)	1/2 (13)	1/4-5/16 (6-8)	14 (2)
<b>HR2X</b>	Hog Ring Staples				HRP1/HRP2	Galvanized Steel	200	3/4 (20)	1/2 (13)	1/4-5/16 (6-8)	14 (2)
<b>HR4</b>	Hog Ring Staples				HRP4	Galvanized Steel	500	1-3/16 (30)	3/4 (20)	3/8 (10)	14 (2)

# Fencing Pliers for Chainlink Fence

*Malco's fencing pliers are available in a highly maneuverable 8-inch (203 mm) length or high leverage 10-inch (254 mm) model.*

This legendary fencing pliers design features three serrated jaw areas for gripping, pulling and tying fence wire. Also, three built-in wire cutter locations ensure easy access for cutting up to 9-gauge (3.8 mm) chain link fence or tensioning wire. A compact, rounded and tapered nose allows easy entry and reach into tight areas. Textured handle surfaces promote safe and sure control. And durable hardened all-steel construction offers long, dependable service life.



Catalog Number	Description	Tool Length in. (mm)	Net Weight oz. (kg)
<b>FP1</b>	8 in. Fencing Pliers	8 (203)	14 (0.40)
<b>FP2</b>	10 in. Fencing Pliers	10 (254)	20 (0.56)



# Chainlink and Vinyl Essentials



**FCP1**

## Multi-Purpose Fencing Pliers

- Combination hammer, wire tensioner, staple remover, wire cutter and splicer
- Two built in wire cutters
- Hammer face
- Claw to remove staples
- All steel body
- Vinyl cushion grips

Malco ... by EDMA



## String and Reel 500 ft. (152 m)

- High visibility string reel used for layout
- Polyethylene reel body with hand crank
- 500 feet of #18 Braided Nylon line

**SR1**



## Chain Link Fencing Tensioners

- For easy one-person installation of chain link fencing
- Set of 2 universal chain link fencing tensioners accommodates T-section or round posts

Malco ... by EDMA



Carbide Tipped Teeth



## Vinyl Cutting Circular Saw Blades

**VCB1:** Versatile 7-1/4 in. (184 mm) blade is a must have for portable circular saws.

**VCB2EV:** Big 10 in. (250 mm) circular blade fits most power miters for making ultra smooth cuts.

**VCB3EV:** Aggressive cutting 12 in. (305 mm) blade with carbide tipped teeth for easy cuts in fence post.



**VCB1**



**VCB2EV**



**VCB3EV**

Catalog Number	Description	Tool Length in. (mm)	Net Weight oz. (g)	Net Weight lbs. (kg)
FCP1	Multi-Purpose Fencing Pliers	10-5/8 (270)	25 (709)	—
FTC1	Chain Link Fencing Tensioners	9.5 (241)	—	1 (.45)
SR1	String and Reel 500 ft.	10 (254)	8 (227)	—

Catalog Number	Description	Max RPM	Teeth	Arbor In. (mm)	Tool Length in. (mm)	Net Weight oz. (g)	Net Weight lbs. (kg)
VCB1	Vinyl Cutting Circular Saw Blade 7-1/4" (184 mm)	6500	186	5/8 (15.875)	—	—	—
VCB2EV	Vinyl Cutting Circular Saw Blade 10" (254 mm)	6500	248	5/8 (15.875)	—	—	—
VCB3EV	Vinyl Cutting Circular Saw Blade 12" (305 mm)	5800	100	1 (25.4)	—	—	—

# Vinyl Fence Picket and Rail Notchers

Designed specifically for use with vinyl fencing, Malco's fence picket and rail notchers make raised tabs in the end sections of vinyl rails and pickets. These louver-shaped tabs create a durable "lock" that prevents the rail or picket from pulling out of the openings.



**Works in cold down to 40°F (4.4°C) and heat up to 120°F (48.9°C)**

## VFN1 Picket & Rail Notcher

Creates 1/2 in. (13mm) wide, 7/8 in. (22mm) deep, louver-shaped tabs in vinyl fence pickets and rails, locking the pickets and rails in place.



## VFN2 Rail Notcher

Creates 3/4 in. (19mm) wide, 7/8 in. (22mm) deep, louver-shaped tabs in vinyl fence rails, locking the rails into post openings.



**VFN1**

Compound leverage and exclusive Redline handles reduce the fatigue of repetitive motions.



Quickly lock rails and pickets in place.



**VFN2**

Easily create 1/2 in. or 3/4 in. (13mm or 19mm) raised tabs on the job site.



The louver-shaped tabs create a durable lock that can withstand high winds and abrupt blows.

Catalog Number	Description	Locking Tab Width in. (mm)	Tool Length in. (mm)	Net Weight oz. (g)
VFN1	Picket and Rail Notcher	1/2 (13)	9 (229)	14 (397)
VFN2	Rail Notcher	3/4 (19)	9 (229)	14 (397)

# Offset Ratcheting Wrench

## Two-way ratcheting action with an effortless handle-swing motion

This versatile, compact and lightweight Offset Ratcheting Wrench provides easy fastener access and fast, two-way ratcheting action with an effortless handle-swing motion. Finger switches are easily accessible to change ratcheting direction. It is ideal for installing or removing fasteners at chain link fence hook-up points. A 25 degree offset design maintains clearance between fingers and chain link fabric when fastening fence hardware such as tension bands, brace bands and rail end cups. The 12-point box heads, at each end of the wrench, grasp standard U.S. 1/2 inch and 9/16 inch hex fasteners from multiple angles. The box head keeps wrench in contact with the fastener for superior control. And through-hole socket openings accommodate any fastener length! Designed for long service life, this Offset Ratcheting Box Wrench exceeds ASME minimum torque requirements. Hardened socket openings and protective nickel chrome plating compliment a solid plastic core sandwiched between the tool's 1/8 inch (3.18 mm) steel plates to ensure that the ratcheting mechanism will function in harsh cold, wet or dirty working conditions.



**RRW6**



Catalog Number	Description	12 Pt. Hex Sockets	Nominal Length	Net Weight
RRW6	Ratcheting Wrench, Offset	1/2 and 9/16 in.	6.75 in. (172 mm)	5 oz. (142 g)

## Multi-Track Pliers

### Multiple slip joint pliers are ideal for use on conduit, pipe and cable connections.

- **Undercut Tongue & Groove Adjustment** will not slip! Jaws are held securely in selected position.
- **PermaLock® Fastener** eliminates nut & bolt failure.
- **Heat Treated Right-Angle Teeth** grip better, last longer.
- **No Pinch Point.** Lower jaw and reinforcing rib prevent handles from touching.
- **Long, Vinyl-Cushioned Handles** give powerful leverage with a gentle spread for easy one-hand operation.



Thin Design, Tempered Steel Halves allow access in confined spaces where other pliers & wrenches won't go.

### STRAIGHT JAW



### RUGGED V-JAW

V-shaped jaw creates more points of contact on pipe and round stock for stronger bite and more control.

**MT12**  
12 in. (300 mm)

**MT10**  
10 in. (250 mm)

**MT7**  
8 in. (200 mm)

**MT6**  
6-1/2 in. (165 mm)

Catalog Number	Description	Overall Length in. (mm)	Jaw Type	Jaw Length in. (mm)	Jaw Capacity in. (mm)	Jaw Adjustments	Handle Span	Net Weight oz. (g)
MT6	Multi-Track Plier	6-1/2 (165)	Straight	13/16 (20.5)	7/8 (22)	5	1-11/16 (43)	6 (170)
MT7	Multi-Track Plier	8 (200)	Straight	1-1/8 (28.5)	1-1/2 (38)	4	1-9/16 (40)	13 (358)
MT10	Multi-Track Plier	10 (250)	V-Jaw	1-3/8 (35)	2 (51)	7	1-3/16 (56)	15 (431)
MT12	Multi-Track Plier	12 (300)	V-Jaw	1-1/2 (38)	2-1/4 (57)	7	1-11/16 (43)	29 (807)