


# RAIL Accessories



Centaur's Sure-Fit® Accessories are designed to provide a wide range of options when it comes to designing and installing your Centaur® fencing system.

- Low profile hardware mounts unobtrusively to posts.
- Crafted from heavy duty steel and powder coated to help prevent corrosion.

## SURE-FIT® ACCESSORIES

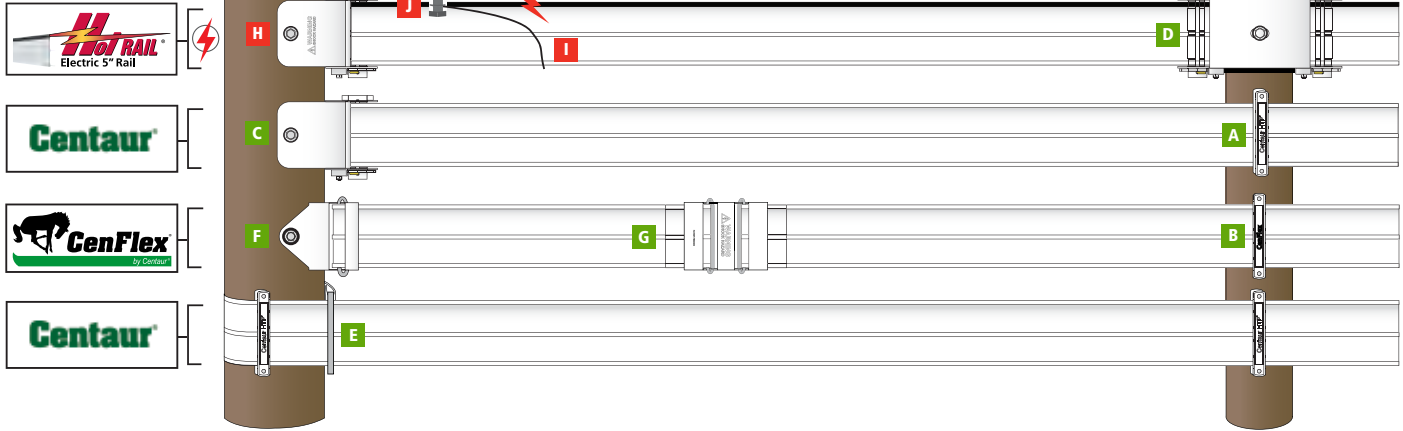

<b>A</b> Centaur Line Bracket	<b>D</b> Two-Way Barrel Tensioner (ISO Pad required when used with Hot Rail)	<b>G</b> Splice Buckle	<b>J</b> Line-Tap Connector
<b>B</b> CenFlex Line Bracket	<b>E</b> Termination Loop	<b>H</b> Hot Rail One-Way Barrel Tensioner	<b>K</b> Insulator Pad
<b>C</b> One-Way Barrel Tensioner	<b>F</b> Termination Bracket	<b>I</b> Undergate Cable	

■ Non-electric fencing and accessories ■ Electric fencing and accessories



### Hot Rail® Flexible Fence Rolls

Electric rail contains a conductive top bead and three strands of 12.5 gauge high tensile steel wire embedded in Deluxe HTP® polymer material. 30-Year Limited Warranty

- |                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| <b>381080</b> White 660' | <b>381083</b> Black 660' | <b>381086</b> Brown 660' |
| <b>381081</b> White 330' | <b>381084</b> Black 330' | <b>381087</b> Brown 330' |



### Centaur® Flexible Fence Rolls

Three strands of 12.5 gauge high tensile steel wire embedded in Deluxe HTP® polymer material. 30-Year Limited Warranty

- |                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| <b>381000</b> White 660' | <b>381003</b> Black 660' | <b>381006</b> Brown 660' |
| <b>381001</b> White 330' | <b>381004</b> Black 330' | <b>381007</b> Brown 330' |



### CenFlex® Flexible Fence Rolls

Three strands of 12.5 gauge high tensile steel wire embedded in Premium HTP® polymer material. 20-Year Limited Warranty

- |                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| <b>381050</b> White 660' | <b>381053</b> Black 660' | <b>381056</b> Brown 660' |
| <b>381051</b> White 330' | <b>381054</b> Black 330' | <b>381057</b> Brown 330' |



### Centaur®/Hot Rail® Line Bracket

Deluxe two-piece belt loop bracket system. HTP® coated steel core for added strength and durability. **No additional insulation required when used with Hot Rail® fencing systems.**

- |                     |                     |                     |
|---------------------|---------------------|---------------------|
| <b>385061</b> White | <b>385062</b> Black | <b>385063</b> Brown |
|---------------------|---------------------|---------------------|



### CenFlex® Line Bracket

Simple one-piece belt loop bracket system. HTP® coated steel core for added strength and durability. For CenFlex® fencing systems only.

385070 White    385074 Black    385078 Brown



### One-Way Barrel Tensioner

Designed to terminate and tension 5" rail around corners and straight lengths up to 660 feet (for every major directional change, deduct 100 feet). Needs to be installed on a 6 to 8 inch wood termination post. For Centaur® and CenFlex® fence systems only.

385123 White    385124 Black    385125 Brown



### Hot Rail® One-Way Barrel Tensioner

Insulated tensioner used to terminate and tension 5" rail around corners and straight lengths up to 660 feet (for every major directional change, deduct 100 feet). Needs to be installed on a 6 to 8 inch wood termination/end post. For Hot Rail® fence systems only.

385456 White    385457 Black    385458 Brown



### Two-Way Barrel Tensioner

Ideal for splicing long runs of 5" rail and tensioning around corners and straight lengths up to 660 feet in each direction for a total combined length of 1,320 feet (for every major directional change, deduct 100 feet). Needs to be installed on a 6 to 8 inch wood termination/end post. ISO insulation pad required when used with Hot Rail® fence systems.

385147 White    385148 Black    385149 Brown



### Splice Cover

Attractively conceals rail splices. Easy to install covers protect wire link splices from the elements and curious horses. Wire links not included, three links needed for each splice cover.

385227 White    385228 Black    385229 Brown



### Sure-Hook® Termination Bracket

Anchors the end of the 5" rail to the wood termination post. No wire stripping or special tools needed. Needs be installed on a 6 to 8 inch wood termination/end, or gate post. For Centaur® and CenFlex® fence systems only.

385443 White    385444 Black    385445 Brown



### Hot Rail® Termination Bracket

Insulated anchor for attaching 5" electric rail to the wood termination post. No wire stripping or special tools needed. Needs be installed on a 6 to 8 inch wood termination/end, or gate post. For Hot Rail® fence systems only.

385459 White    385460 Black    385461 Brown



### Sure-Hook® T-Bracket

Ideal for cross fence installations of 5" rail. For Centaur® and CenFlex® fence systems only.

385449 White    385450 Black    385451 Brown



### Inside Corner Roller

The 5" rail glides along the roller reducing friction and providing smooth directional changes on inside corners. Needs to be installed on a 6 to 8 inch wood corner post.

**385453 White    385454 Black**



### Sure-Hook® Splice Buckle

Splices two pieces of 5" rail together to create a longer piece of rail. No wire stripping or special tools needed. Quick and easy way to splice a 5" rail.

**385446 White    385447 Black    385448 Brown**



### Termination Loop

Anchors the end of the 5" rail to the wood termination post. No wire stripping or special tools needed. This wrap-around anchor method is ideal for reducing the possibility of brace post twisting. Needs be installed on a 6 to 8 inch wood termination/end, or gate post. **For Centaur® and CenFlex® fence systems only.**

**346125 Termination Loop**

