

Planning Instructions 150ft. Fence, 20ft. Spacing




(8) CPL2



CPT600DCA



CLW142500

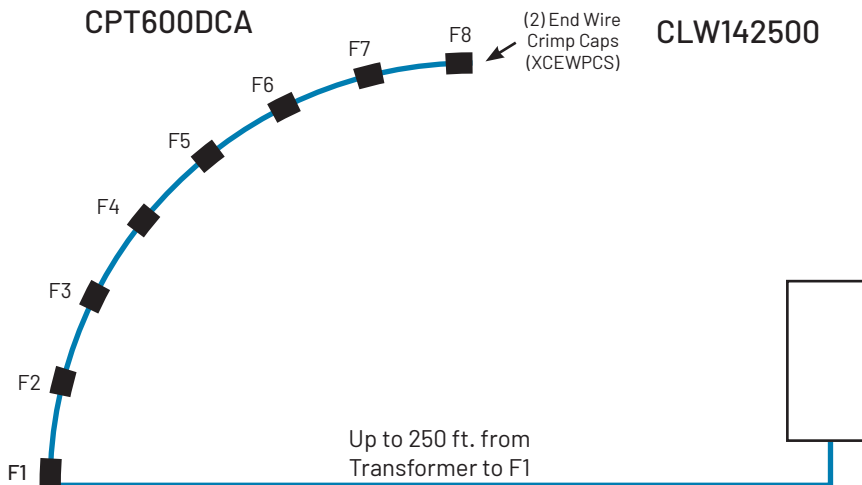

Kit Contents

Please check that you received all of these components.


- (8) CAST LED Perimeter Lights (CPL2)
- (1) CPT600DCA CAST Perimeter Lighting DC Transformer (CPT600DCA)
- (1) 500 Ft. Roll CAST #14/2 No-Ox Wire (CLW142500)
- (16) Quick-connect Posi-Tap splice connection (CPQC1) (2 per fixture)
- (80) Steel Ball Tie Wraps (CPSSTIE11)
- (1) Bag 3/8 Shrink Tubing 2 inch per Tie Wrap (CHS3850)
- (2) End Wire Crimp Cap (XCEWPCS)

NOTES:

1. Attach wire directly to inside of horizontal fence pipe at 7 o' clock orientation. Use cable ties every 24 inches, and add 2 inches of CHS3850 per tie wrap to protect wire.
2. Attach wire to common and 26 Volt Tap.
3. Make sure all terminal block connections are tight.

NOTE 1: Fixture mounts to Round upright fence post 4.5 inch O.D. or smaller. Contact factory for other post mounting options.

NOTE 2: 1/2 inch knockout in bottom of light for conduit if needed.

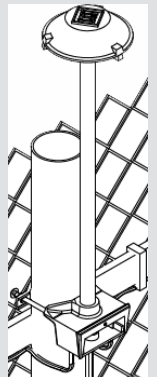

Questions on your system design?
Call CAST Lighting at 973-423-2303

Important: Follow all local electrical codes and requirements.