

## Planning Instructions

### 250ft. Fence, 20ft. Spacing




(12) CPL2



CPT600DCA



CLW122500

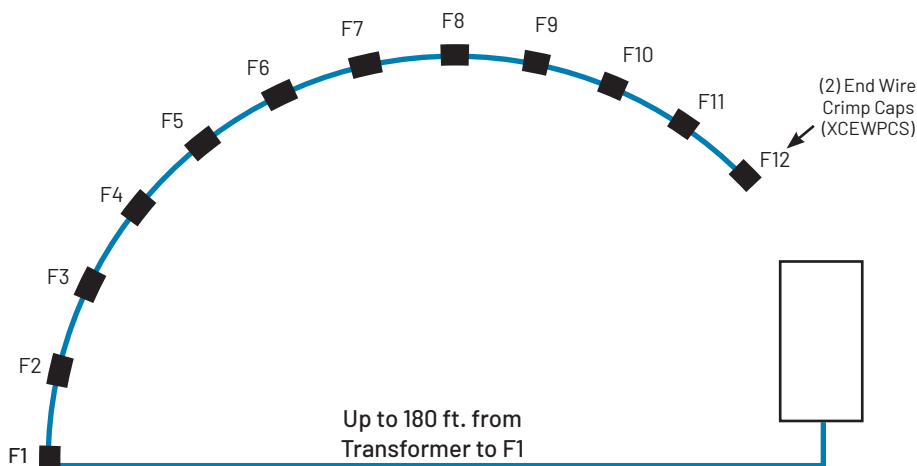

Questions on your system design?  
Call CAST Lighting at 973-423-2303

**Important:** Follow all local electrical codes and requirements.

## Kit Contents

**Please check that you received all of these components.**

- (12) CAST LED Perimeter Lights (CPL2)
- (1) CPT600DCA CAST Perimeter Lighting DC Transformer (CPT600DCA)
- (1) 500 Ft. Roll CAST #12/2 No-Ox Wire (CLW122500)
- (24) Quick-connect Posi-Tap splice connection (CPQC1) (2 per fixture)
- (125) Steel Ball Tie Wraps (CPSSTIE11)
- (1) Bag 3/8 Shrink Wrap Tubing 2" per Tie Wrap (CHS3850)
- (2) End Wire Crimp Cap (XCEWPCS)

## NOTES:

1. Attach wire directly to inside of horizontal fence pipe at 7 o'clock orientation. Use cable ties every 24 inches, and 2 inches of CHS3850 per tie wrap to protect wire.
2. Attach wire to common and 26 Volt Tap.
3. Make sure all terminal block connections are tight.

**NOTE 1:** Fixture mounts to Round upright fence post 4.5 inch O.D. or smaller. Contact factory for other post mounting options.

**NOTE 2:** 1/2 inch knockout in bottom of light for conduit if needed.

