

CPL2K8020

### Planning Instructions 80ft. Fence, 20ft. Spacing




(4) CPL2



CPT600DCA



CLW142500

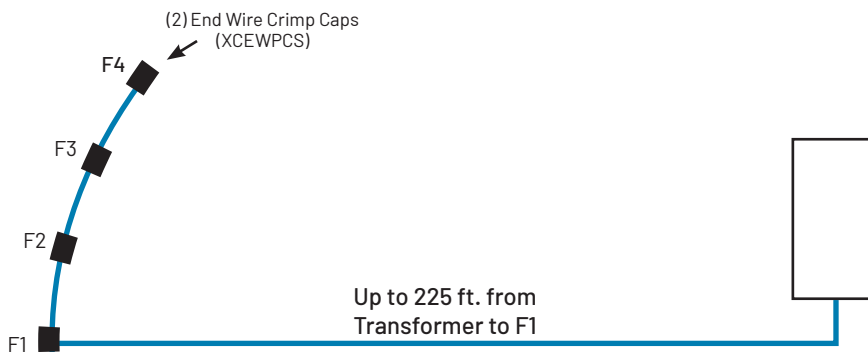

Questions on your system design?  
Call CAST Lighting at 973-423-2303

Important: Follow all local electrical codes and requirements.

### Kit Contents

Please check that you received all of these components.

- (4) CAST LED Perimeter Lights (CPL2)
- (1) CPT600DCA CAST Perimeter Lighting DC Transformer (CPT600DCA)
- (40) CPSSTIE11-Steel Ball Tie Wraps
- (1) CHS3850- Bag 3/8 Strink Tubing 2" per Tie Wrap
- (1) 500 Ft. Roll CAST #14/2 No-Ox Wire (CLW142500)
- (8) Quick-connect Posi-Tap splice connection (CPQC1) (2 per fixture)
- (2) End Wire Crimp Cap (XCEWPCS)

### NOTES:

1. Attach wire directly to inside of horizontal fence pipe at 7 o'clock orientation. Use cable ties every 24 inches, and 2 inches of CHS3850 per tie wrap to protect wire.

2. Attach wire to common and 26 Volt Tap.

3. Make sure all terminal block connections are tight.

**NOTE 1:** Fixture mounts to Round upright fence post 4.5 inch O.D. or smaller. Contact factory for other post mounting options.

**NOTE 2:** 1/2 inch knockout in bottom of light for conduit if needed.

