


D SUREClose® READYFit 180°



Hydraulic, Hinge-Closer System Self-Closes Heavy-Duty Gates From 180°

TESTED TO OVER 500,000 OPEN-CLOSE CYCLES

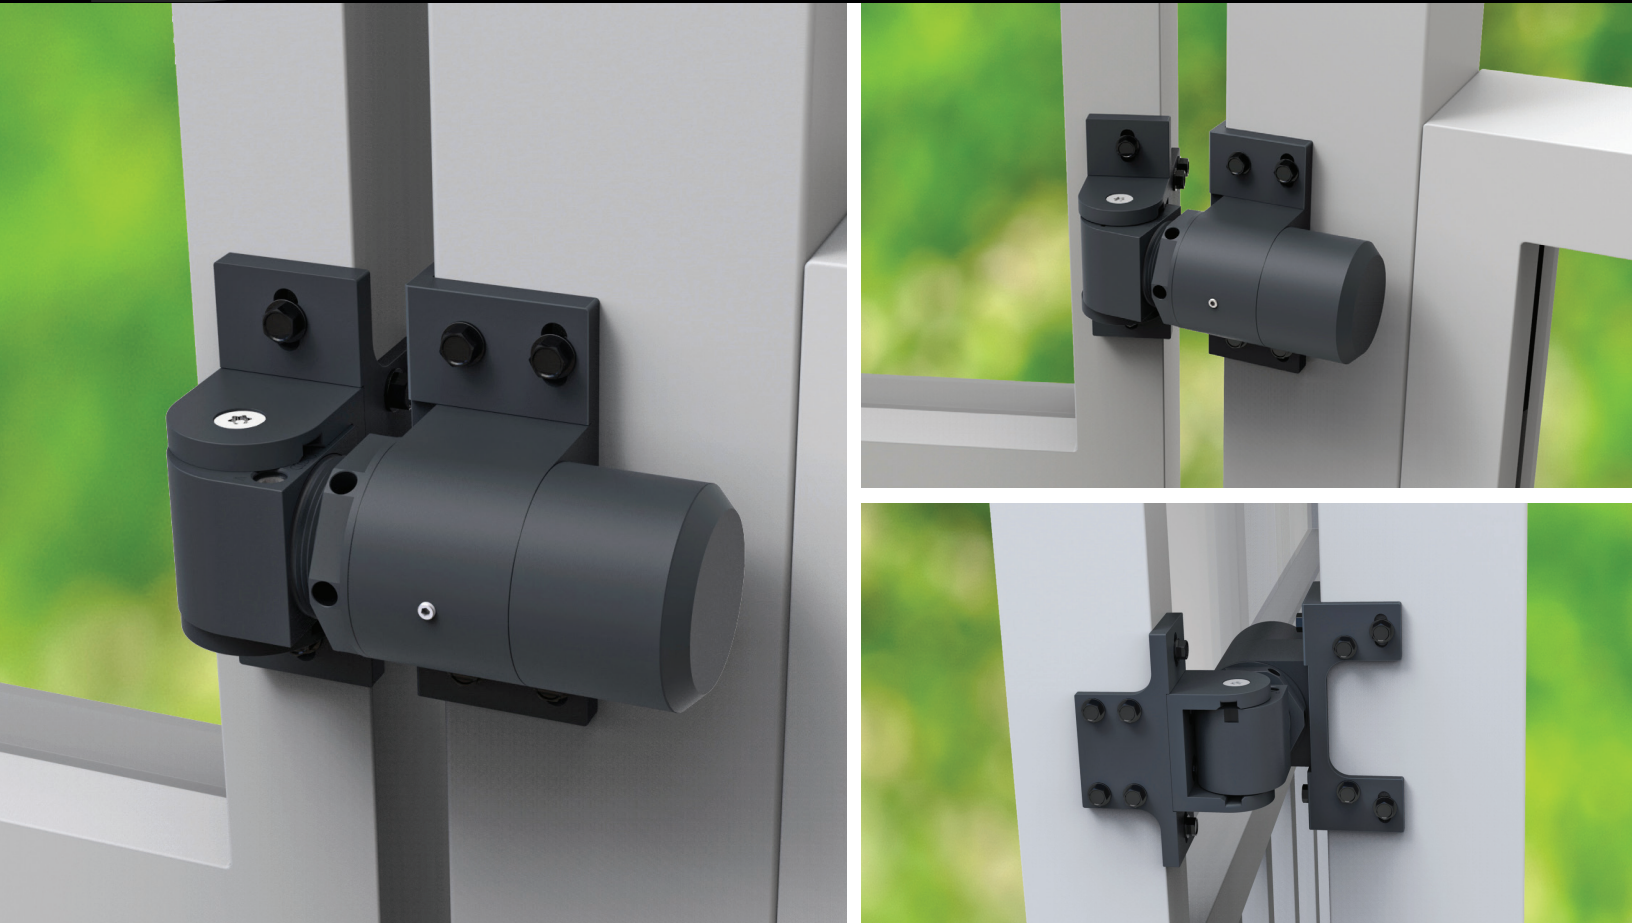

Powerful, dependable commercial-grade hinge-closers

- Self-closes and soft-closes gates from 180°
- Closes gates up to 180 lb
- Industry-best 5-Year Warranty*
- Highly adjustable: vertical, horizontal, closing force & final-snap action
- Anti-back slam feature gradually slows opening gate speed after 90°, preventing damage
- Suitable for ADA usage
- Highly tamper resistant, with stainless steel security Torx screws
- Models with aluminum and steel brackets (screw-on & weld-on)
- Serviceable: replacement piston cartridges will extend closer life
- Minimum 2" fence post width
- For gate gaps of ½"–1⅜"




D&D Technologies

World's most trusted gate hardware



SUREClose® READYFit 180°

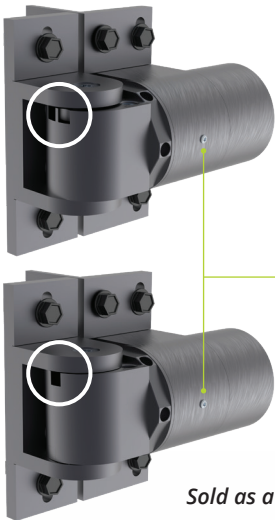



Hinge variations provide self-closing from 180° to -2°

DOUBLE-DIMPLED hinge must be mounted to top of gate. Self-closes from 180-80° Right-hand operation shown, with adjustment valves facing up.

NEW GRUB SCREW Tightens to lock horizontal adjustment in place

SINGLE-DIMPLED hinge must be mounted to bottom of gate. Self-closes from 100--2°

Sold as a set of 2 hinges

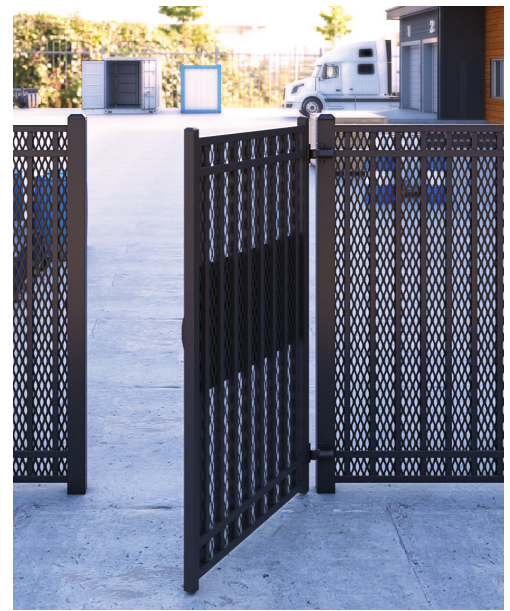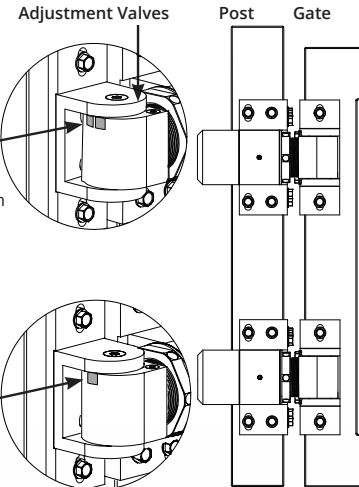

CODE	MODEL	MOUNTING	GAP VARIANCE	SELF CLOSING FROM	MAX. GATE OPENING	ADJUSTABLE CLOSING SPEED	FINAL SNAP-CLOSE ACTION	POOL/ CHILD SAFETY	MAX. SELF-CLOSE WEIGHT	MIN. POST SIZE
74108333T	RF 108S S 180	Alum Weld or Screw	½" to 1¾"	180°	180°	Yes	Yes	Yes**	180 lb	2"
74108335T	RF 108S W 180	Steel Weld or Screw	½" to 1¾"	180°	180°	Yes	Yes	Yes**	180 lb	2"

* **WARRANTY CONDITIONS** vary according to gate or door application and usage. See full Warranty details and limitations on D&D Technologies' website.


** (SF) = Caution Not suitable for child/pool safety gates unless a gate-stop is installed at a maximum of 170°. DO NOT PROP GATE OPEN. When used on a swimming pool gate always consult local authorities for swimming pool fencing codes. Forcing a gate beyond a 180° opening will damage the hinges and void the Warranty.

READYFIT Brackets

Models	Bracket Material	Mounting
74108333T	Aluminum	Screw & Weld-on
74108335T	Steel	Screw & Weld-on


SELF-CLOSING 180 - SAFETY

Suitable for child/pool safety*
DO NOT PROP GATE OPEN

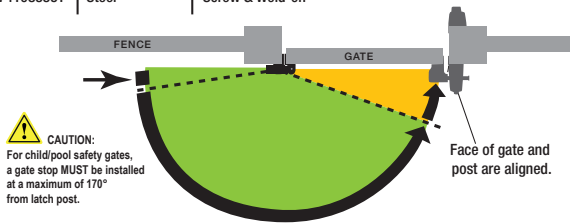

CAUTION: For child/pool safety gates, a gate stop **MUST** be installed at a maximum of 170° from latch post.

All mounting brackets and fasteners included.

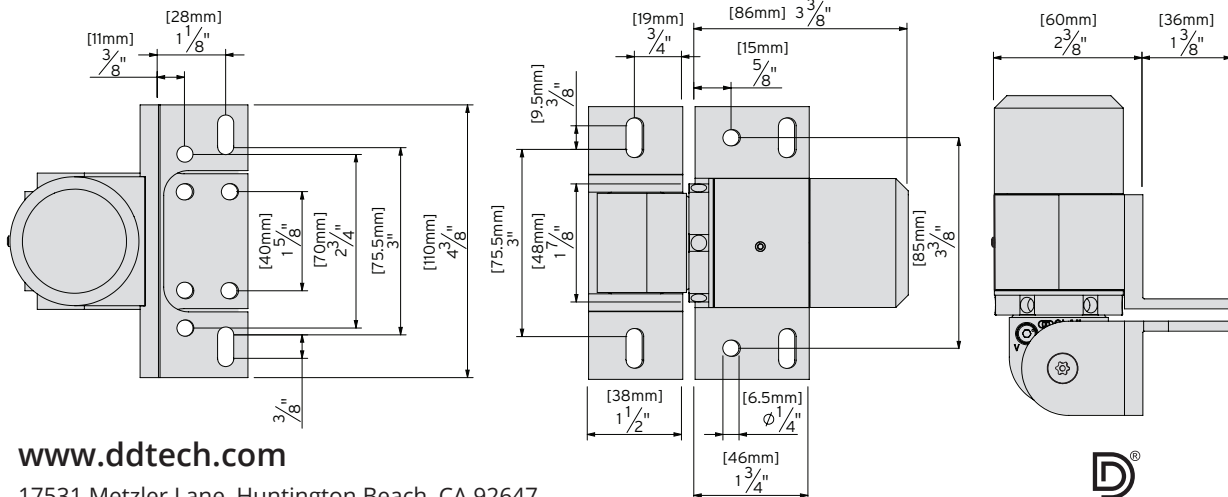

www.ddtech.com

17531 Metzler Lane, Huntington Beach, CA 92647
Tel: (800) 716-0888 or (714) 677-1300
E-mail: info@ddtechusa.com

D&D Technologies
World's most trusted gate hardware

MKT-137-0819