

AMERICAN ACCESS SYSTEMS, INC.

INSTALLATION INSTRUCTIONS

*StandAlone Mechanical Card Reader
Model #'s 11-024 & 11-024i*



TECHNICAL SUPPORT: 800.541.5677 Monday thru Friday 8:30 am - 5:00 pm MST

AAS 2-Year Limited Warranty

This warranty applies to all product or equipment specifically and solely designed for and manufactured by American Access Systems, Inc. Any equipment used in AAS products that is not manufactured by American Access Systems, Inc. (this includes all products purchased by AAS for OEM purposes) is liable and subject to warranty terms of that specific manufacturer. Those products used by AAS which are not covered by the AAS 2-Year Limited Warranty are: TekTone, HID, SecuraKey and Omniprint.

If your AAS product is defective and returned within two years of the date of purchase, we will repair it, or at our option, replace it at no charge to you. If we repair your AAS product, we may use new or reconditioned parts. If we choose to replace your AAS product, we may replace it with a new or reconditioned unit of the same or similar design. The repair or replacement will be warranted for 90 days or the remainder of the original two-year warranty period, whichever is longer.

Limitations:

Implied warranties, including those of fitness for a particular purpose and merchant ability (an unwritten warranty that the product is fit for ordinary use), are limited to two years from date of purchase. We will not pay or recompense for loss of time, inconvenience, loss of use of your AAS product, service calls or property damage caused by your AAS product, its failure to work or any other incidental or consequential damages. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above exclusions or limitations may not apply to you.

What we ask you to do:

To get warranty service for your AAS product, you must provide proof of the date of purchase. Contact the original dealer or installer of the product and return your AAS product along with the receipt to them. If you have problems locating the dealer or installer, please contact American Access Systems, Inc at (303) 799-9757 and we will direct you to an authorized dealer or distributor of AAS products. If you ship your AAS product, you must prepay all shipping costs. We suggest that you retain your original packing material in the event you need to ship your AAS product. On return, include your name, address, phone number, proof of date of purchase, RMA # (obtained through an authorized AAS dealer or distributor) and a brief description of the operating problem. **IF AN RMA # IS NOT LISTED ON THE EXTERIOR OF THE PACKAGING OR THE PAPERWORK YOU INCLUDE, THE PRODUCT WILL BE RETURNED TO YOU. NO SERVICE WORK WILL BE PERFORMED UNTIL AN RMA # IS OBTAINED AND INCLUDED WITH YOUR SHIPMENT TO US.**

What this warranty does not cover:


This warranty does not cover defects resulting from accidents, damage while in transit, alterations, unauthorized repair, failure to follow instructions, misuse, fire, flood or acts of God. Nor do we warrant your AAS product to be compatible with any particular external device or peripheral. If the warranty has expired on your AAS product or if your product is NOT covered, please contact your dealer or installer for advice on whether we will repair your AAS product and other repair information, including estimated repair costs and other charges.

This warranty is the only one we give on our products, and it sets forth all of our responsibilities regarding your AAS product. There are no other express warranties.


State Law Rights:

This warranty gives you specific legal rights and you may also have other rights that vary from state to state.

WIRING DIAGRAM

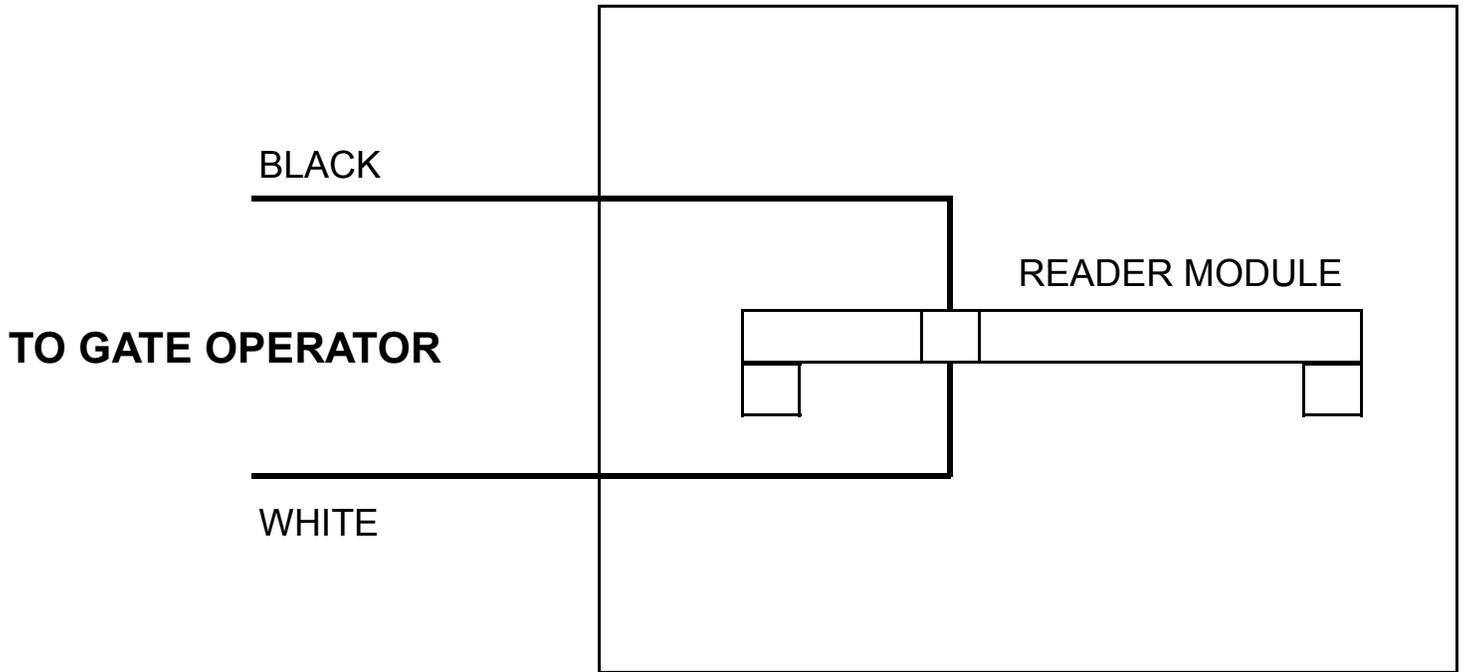


NIGHT LIGHT HOOKUP

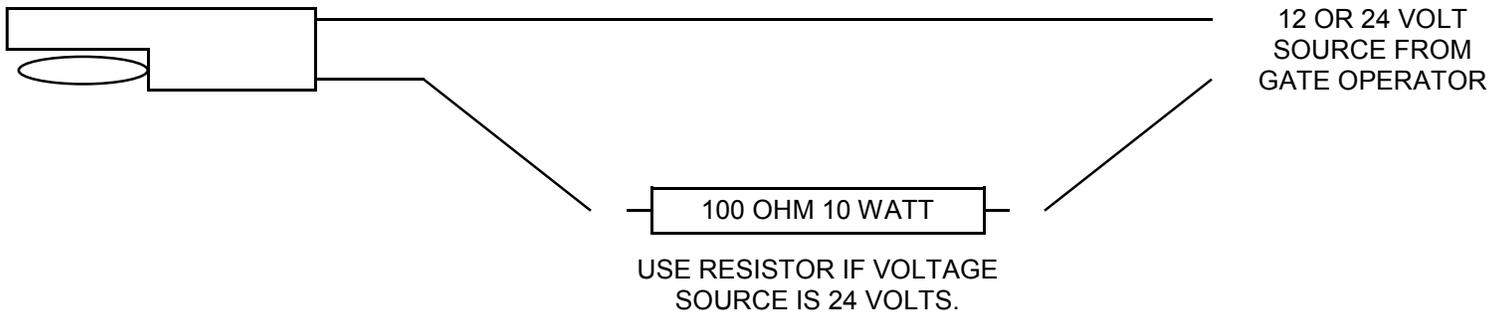

AMERICAN ACCESS SYSTEMS

INSTRUCTIONS FOR PROGRAM CARTRIDGE INSERTION AND TECHNICAL SPECIFICATIONS

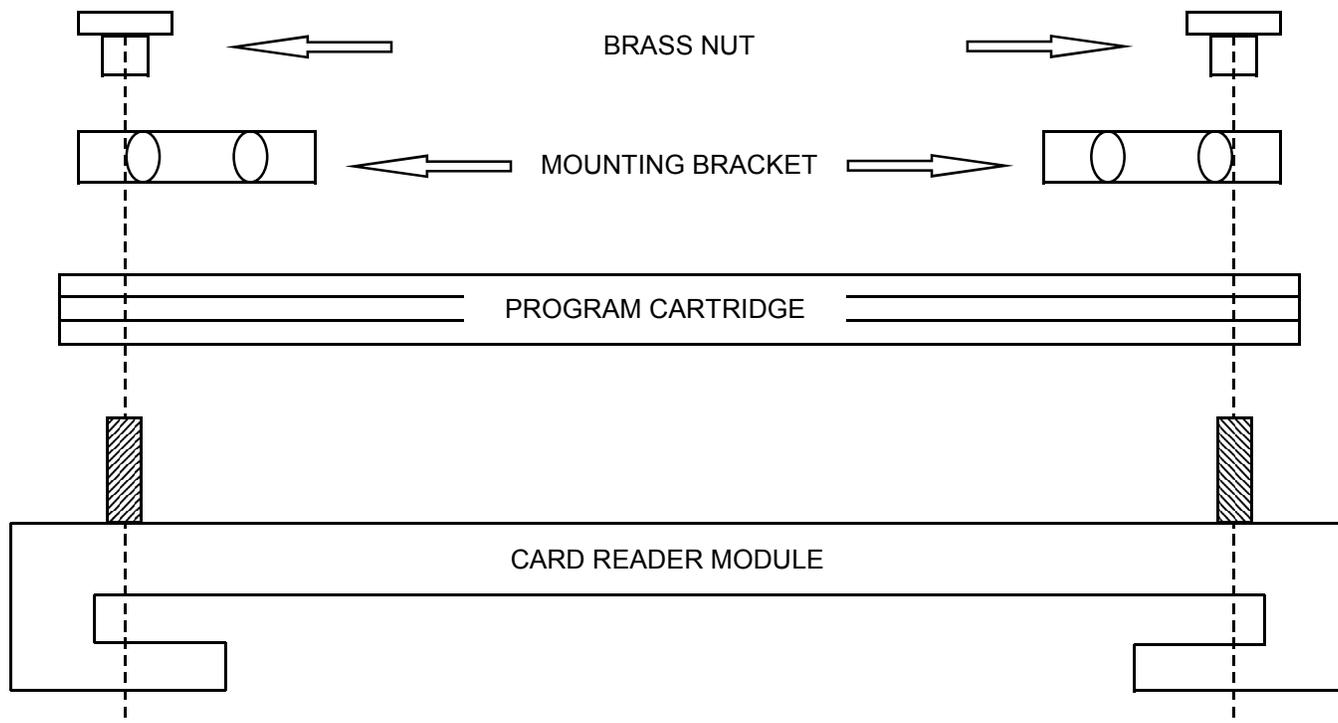

INSTRUCTIONS

1. Remove the brass screws and slip the reader module from mounting bracket
2. Place the program cartridge between the reader module and the mounting brackets and reassemble the unit

SPECIFICATIONS

- Power requirement: None unless night light is desired
- Switching capacity: 5 Amp 250 VAC or 5 Amp 26 VDC
- Switching Logic: Normally Open
- Ambient Temperature: Up to 180 Degree F (82 C)
- Humidity: Non Condensing - 35% maximum
- Note: Warranty void if actual card reader module is disassembled