




ENGINEERED  
**PLUG-IN TRANSFORMER**  
with LED and BASIC SURGE PROTECTION  
RT-2440SL/M

## **REVERE INDUSTRIES**

REVERE INDUSTRIES • 1101 BIENVILLE STREET • NEW ORLEANS, LA 70112  
504 523-3503 • 800 843-8321 • 24-HOUR FAX ORDER LINE 800 511-1821

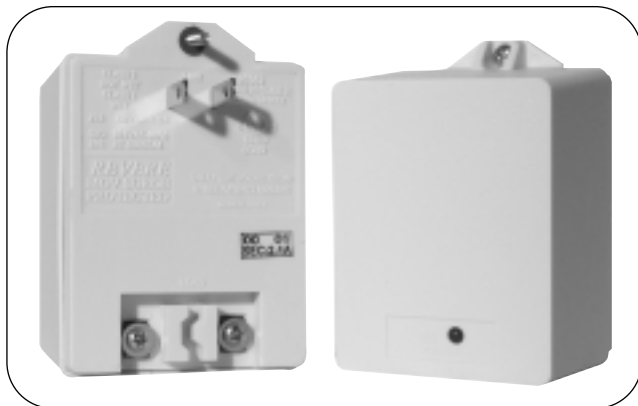

BAR CODED

### **SPECS AT A GLANCE**

- UL Listed
  - Primary .....120VAC 60Hz
  - Secondary .....24VAC, 40VA
  - LED Indicator .....Supervises power
  - Primary Termination.....2 Male Blades
  - Secondary Termination.....2 #6-32 Screw Terminals  
with washers for secure contact
  - Size.....2 7/8" W x 2 1/4" D x 3 7/8" H
  - Weight.....1.5 lbs.
  - Color.....Bright Decorator White
- #### Surge Protection Specs
- Single Mode Protection .....Hot to Neutral
  - Clamping Voltage.....340V
  - Max. Spike Current.....4500 Amps
  - Energy Dissipation.....60 Joules
  - Max. Spike Voltage .....6000 Volts
  - Clamping Response Time .....25 Nanoseconds



### **DESCRIPTION**

The **REVERE** ENGINEERED™ RT-2440SL/M is a 24VAC, 40VA Class II U.L. Encased Plug-in Transformer with LED indicator for power supervision, built in cable strain relief, and with basic surge protection. Its construction is a bright decorator white colored plastic. It comes with a mounting tab and mounting screw. The compact design, as well as its decorator color, makes it perfectly suitable for office or residential decors.