
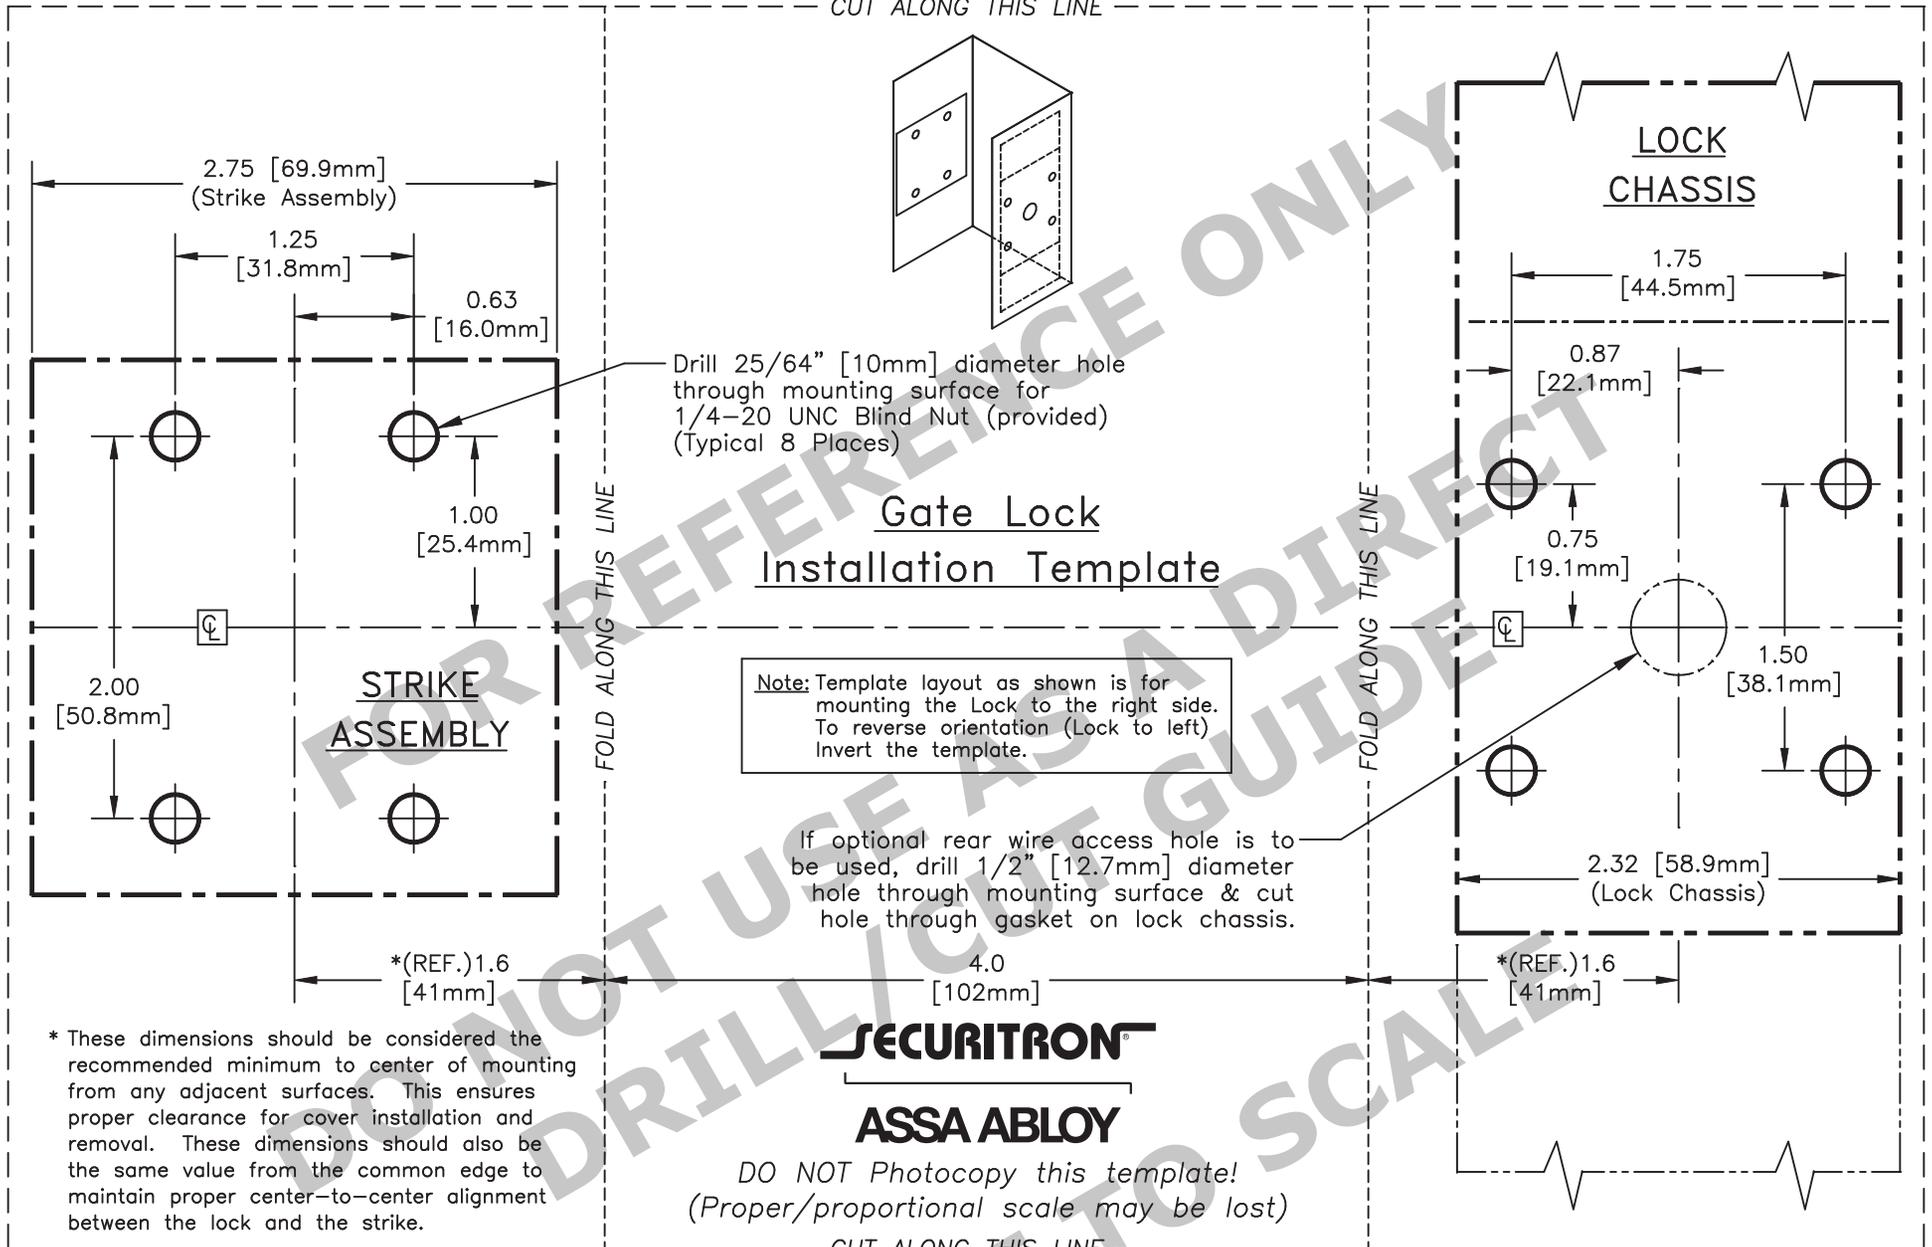


CUT ALONG THIS LINE

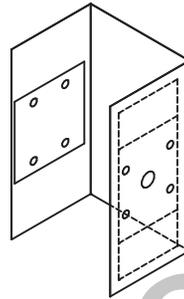

Drill 25/64" [10mm] diameter hole through mounting surface for 1/4-20 UNC Blind Nut (provided) (Typical 8 Places)

### Gate Lock Installation Template

Note: Template layout as shown is for mounting the Lock to the right side. To reverse orientation (Lock to left) Invert the template.

If optional rear wire access hole is to be used, drill 1/2" [12.7mm] diameter hole through mounting surface & cut hole through gasket on lock chassis.



DO NOT Photocopy this template!  
(Proper/proportional scale may be lost)

CUT ALONG THIS LINE

\* These dimensions should be considered the recommended minimum to center of mounting from any adjacent surfaces. This ensures proper clearance for cover installation and removal. These dimensions should also be the same value from the common edge to maintain proper center-to-center alignment between the lock and the strike.

- INSTRUCTIONS:**
1. Refer to product installation and operating instructions for additional guidance and mounting details.
  2. Cut out template and fold at indicated lines. (Lock & strike hole pattern layouts may be cut out separately on the fold lines and used independently as long as center alignment is maintained).
  3. Close gate and verify 4.0" [102mm] distance between the lock and strike mounting surfaces.
  4. Position template orienting the lock chassis and strike assembly hole patterns over their mounting surfaces as desired.
  5. Mark hole centers and center punch for drill point index.
  6. Drill holes for mounting as required. NOTE: If using the provided blind nut inserts, see product installation and operating manual for proper blind nut installation procedure.