

Move all components except the table top from the lid of the box. Place the lid, with the table top, on a flat surface and tear the box at the corners for easier access.



Position the legs of the table on the cross rails of the top with the notch of the leg inboard.



Pass the seat beam through the legs, leaving 10 - 3/4" on both sides as shown.



Predrill the legs into the top cross



Drive screws into the cross rails on both the outside and inside face of the leg as shown.




Secure the seat beam to the table leg as shown.



7 Position the table leg brace in the center to the seat beam.




8 Secure the brace to the beam with screws.

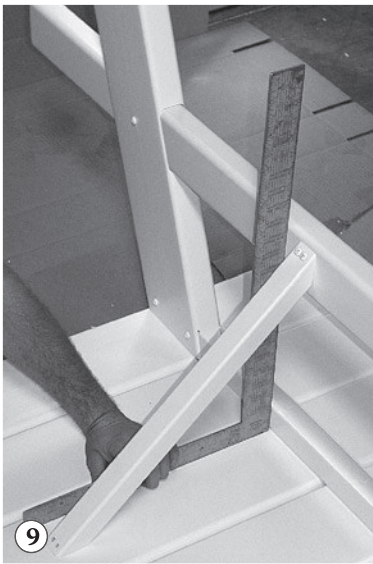

Using the same measurement from the previous step, position the brace on the center of the table top. Make sure that the legs are square to the top and screw in place.

(Anything square can be used to perform the last step, including the back of a tablet.).

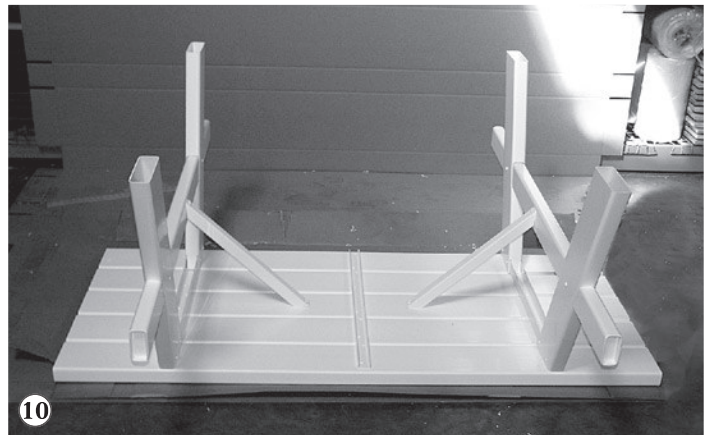

10 Finished to this point and ready to be turned over.



11 Place the benches on the beams and fasten in place with screws, as shown. Your table is now complete. Enjoy!

Contents:

Qty	Description
1	Top Section
2	Seat Section
4	2" x 6" Legs
2	2" x 4" x 60" Seat Beams
2	1 1/2" Sq. Braces
40	1" Screws
1	Instruction Sheet