




**CAST Perimeter Light (CPL1)**

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Specifier: \_\_\_\_\_

Drawing not to scale

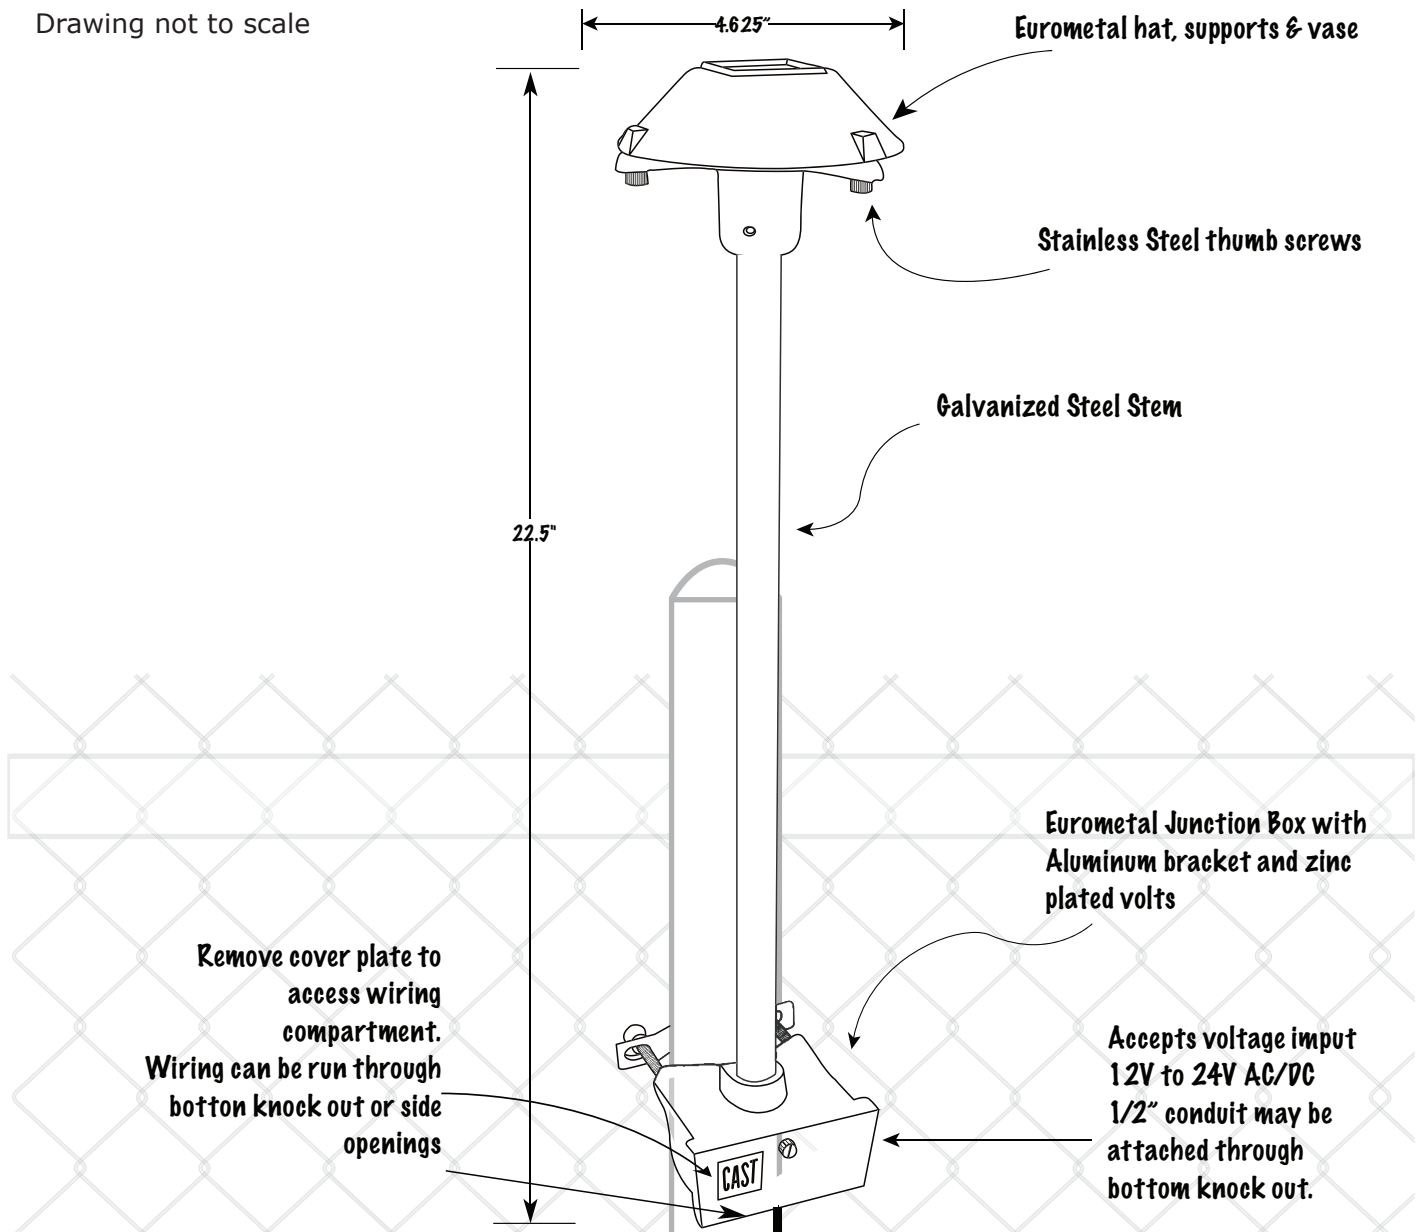

Plan Symbol:

**Specifications**

- Impur Voltage: 12 volts to 24 volts AC or DC (polarity dependant)
- Input Current and Power: 0.41amps (+/- 10%); 6.2 watts (+/- 18%) (over 12-24v range)
- Power Factor: 0.88 (+/- 0.1) (over 12-24v range)
- Ambient Temperature Range: -40C to 55C

**ACCESSORIES**

- 24V (200VA) CAST Perimeter Transformers (CPT300, CPT600, E1CPT300, E1CPT600)
- CAST No-Ox Tin-Coated, Marine-Grade Wire (all sizes)
- CAST Photocell (CTPC, CTRTC)