



Maasdam — The Original.
Often Imitated...Never Duplicated™

Cable Pow'R Pulls

LIFETIME WARRANTY

MADE IN THE USA
OF U.S. AND
IMPORTED PARTS

1 Ton Cable Puller

Model #: 144S-6 ▲

Weight: 7.63 lbs
Cable Length: 12 ft.
Cable Lift: 12 ft.
Cable Diameter: 3/16-in.
Leverage: 15:1



2 Ton Cable Puller

Model #: 144SB-6 ▲

Weight: 8.75 lbs
Cable Length: 12 ft.
Cable Lift: 6 ft.
Cable Diameter: 3/16-in.
Leverage: 30:1



1 & 2 Ton Cable Puller

Model #: 144C-6 ▲

Weight: 9.13 lbs
Cable Length: 12 ft. (1 & 2 Ton)
Cable Lift: 12 ft. (1 Ton), 6 ft (2 Ton)
Cable Diameter: 3/16-in.
Leverage: 15:1 (1 Ton), 30:1 (2 Ton)



3/4 Ton Cable Puller

Model #: 264S-5 ▲

Weight: 7.86 lbs
Cable Length: 22 ft.
Cable Lift: 22 ft.
Cable Diameter: 5/32-in.
Leverage: 15:1



For over 60 years, Maasdam® has produced Pow'R-Pulls to exacting standards. Using only premium components, we produce the finest quality winch/puller available, backed by a full Lifetime Warranty - a first for domestic winches.

Features:

- 1 piece, aluminum alloy ratchet wheel
- High strength, electro-plated steel parts
- "Notch-at-a-time" letdown
- Drop forged steel slip hooks
- Non-slip plastic grip
- OSHA recommended safety latches
- Uses galvanized, aircraft quality cable

Heavy-Duty Pow'R Pulls

LIFETIME WARRANTY

MADE IN THE USA
OF U.S. AND
IMPORTED PARTS

3 Ton Cable Puller

Model #: 6000S ▲


Weight: 29.0 lbs
Cable Length: 12 ft.
Cable Lift: 12 ft.
Cable Diameter: 5/16-in.
Leverage: 35:1



4 Ton Cable Puller

Model #: 8000SB ▲

Weight: 34 lbs
Cable Length: 6 ft.
Cable Lift: 6 ft.
Cable Diameter: 5/16-in.
Leverage: 65:1

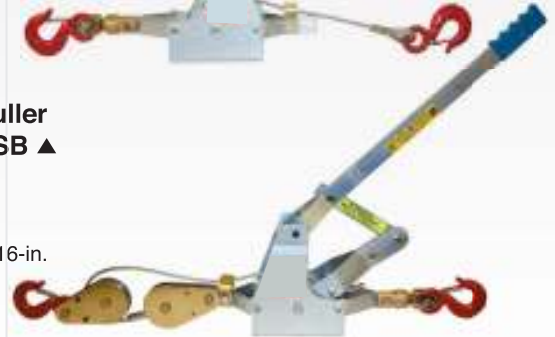

Features:

- 1 piece, aluminum alloy ratchet wheel
- High strength, electro-plated steel parts
- Galvanized 5/16" Aircraft Cable
- "Notch-at-a-time" letdown
- Drop forged steel slip hooks
- Permanent, non-slip plastic grip
- 8000SB has patented compound lever

Suggested Applications:

- Lifting construction material
- Erecting buildings and towers
- Moving, placing and installing heavy equipment
- Tightening conveyor belts
- Clearing debris

Aircraft Cable Ratings



Cable Swaging

Method of securely inserting aircraft cable into terminal end for everlasting bond.

AIRCRAFT CABLE RATINGS

- Based on military specs
- 7-in. x 19-in. galvanized aircraft cable

Cable Diameter	Minimum Breaking Strength Tested
3/16-in.	4,200 lbs.
5/32-in.	2,800 lbs.
1/8-in.	2,000 lbs.

⚠ WARNING: This product can expose you to di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Pull'R Holding Company, LLC., parent company of Bucket Boss®, Dead On Tools® & Maasdam®
1-888-797-7855 • www.maasdam.com • www.pullr.com