

GTO F110 Surface Mount Gooseneck Stand Kit

INSTRUCTIONS FOR ASSEMBLY AND SURFACE-MOUNT INSTALLATION

This box contains all parts for a surface-mount installation with 45 inches above the ground. Important: Assemble and tighten post completely before bolting flange to the ground to prevent face plate from facing in the wrong direction.

STEP 1

Assemble the three pieces of the mounting post together by screwing them together.

STEP 2

Determine the location of the Mounting Post installation.

STEP 3

Determine the appropriate type of bolts for the mounting surface that will securely hold the post in place.

STEP 4



If for use with hard wire access controls, provide path for wires. We recommend using PVC conduit.

STEP 5



DO NOT continue unless post is assembled and tightened completely. Drill four holes in the flange and mount to the surface with the bolts.

STEP 6


Install keypad/intercom according to products instructions.

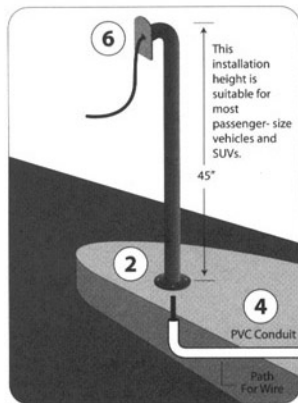

5



*Optional added height mounting option. Additional hardware not included.



F103 Extensions
Sold Separately

* Optional extra extension for added height (not included)

For commercial vehicle height add extra sections (F103) special order from your retailer.

