

FMK

Flex-Mount Gate Lock Bracket Kits



FMK-SW Swinging Gate Kit

The Flex Mount Bracket System is an intuitive set of mounting brackets designed exclusively for use with the 1200 lb. M62FG Magnalock® and the 2000 lb. GL1 Gate Lock. Using pre-formed post channels and plates of varying lengths, a professional looking high security gate lock mounting platform can be assembled in minutes without special tools.

Features & Benefits

- Pre-configured kits include all lock mounting hardware and post shims
- Post brackets are pre-drilled, lock and strike brackets are pre-tapped
- 8" tall x 3/16" thick zinc-plated steel provides durability and long life
- Lock and strike brackets are reversible doubling the mounting variations
- Allows simple bolt on installation, or the entire system can be welded
- Allows superior adjustability of lock and strike before final welding
- Permits electronics to be mounted on either the fence post or gate post

How To Order


Part #	Description
FMK-SL	Flex-Mount Bracket Kit, Sliding Gate
FMK-SW	Flex-Mount Bracket Kit, Swinging Gate
FMB9-4	Flex-Mount Post Shim Brackets (pkg of 4)

Post Shim Brackets are used to adapt both small and large Post Brackets to pole/post sizes smaller than 2" or 3" respectively in 1/8" increments - 1-7/8", 1-3/4", 1-5/8", 2-7/8", 2-3/4", etc.


When more than two shims are used together on a single post, welding the bracket to the pole/post is always recommended.




FMK-SL Sliding Gate Kit

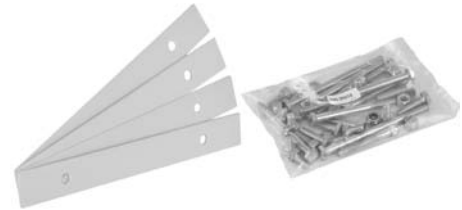

All necessary mounting hardware including four Post Shims is included with each Flex-Mount kit

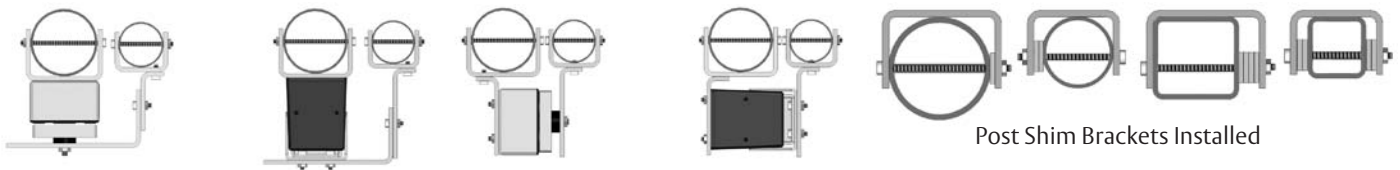


Post Shim Brackets Installed

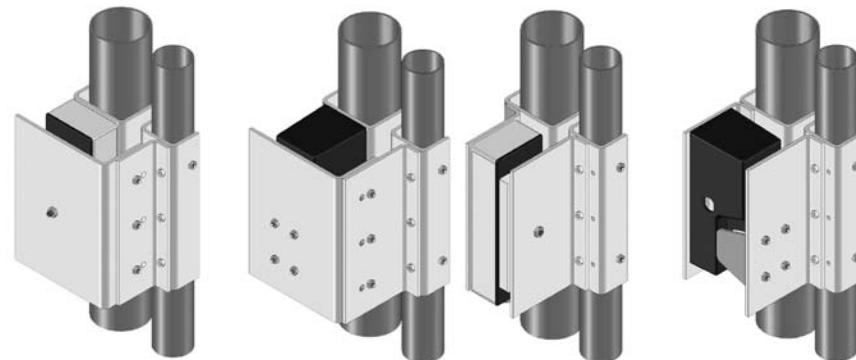

Flex-Mount Swinging Application

Flex-Mount Sliding Application



Post Separation

Notes

- **FMK-SL** will function with GL1 when post separation is between 1" and 3-3/4"
- **FMK-SL** will function with M62FG when post separation is between 1" and 2-1/4" when using Shock Absorbing Strike Mount (SASM)
- **FMK-SL** will function with M62FG when post separation is between 1" and 3-3/4" without SASM
- **FMK-SW** will function with either the M62FG or the GL1 when post separation is between 1" and 2-3/4"

Flex-Mount Brackets are Available Individually for Specialized Applications - Contact Technical Support