

GATE SPECIFICATIONS

STANDARD


Gate Ends: 1-1/4" (16 Ga.) Steel

Rails: 7/8" x 1-1/4" (14 Ga.)


Pickets: 5/8" (18 Ga.)

All component intersections are welded for greater strength

GATE DRAWING DIMENSIONAL FORMAT

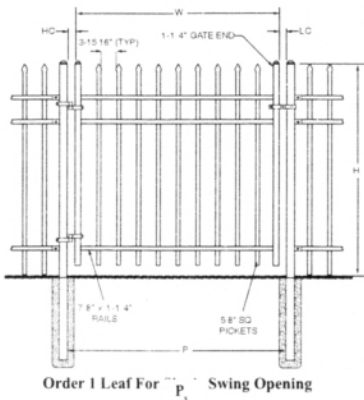

Order 1 Leaf For P_s Swing Opening

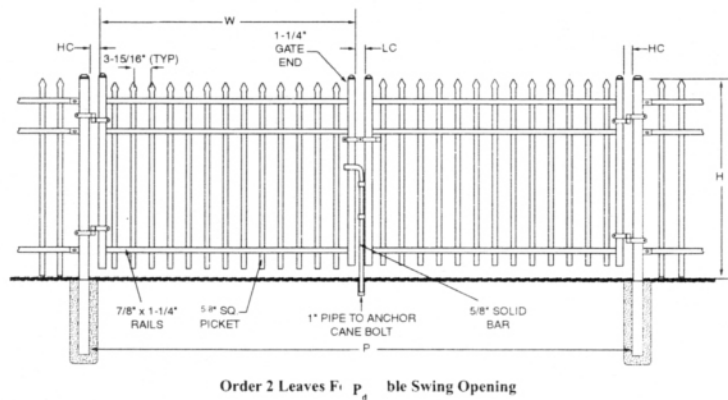

Order 2 Leaves For P_d Double Swing Opening

W = Outside To Outside Width of Finished Gate Leaf

H = Height; HC = Hinge Clearance; LC = Latch Clearance;

P_s = Gate Post Spacing (Inside-To-Inside) for Single Gate; P_d = Gate Post Spacing (Inside-To-Inside) for Double Gate

HARDWARE KITS & POST INTERSPACES FOR MONTAGE & MONTAGE ATF <u>SINGLE SWING</u> WELDED STEEL GATES							
NOMINAL GATE OPENING	3'	4'	5'	6'	7'	8'	
W = LEAF WIDTH	36-1/2"	45"	62-1/2"	71"	79-3/4"	96-1/2"	
POOL, PET & PLAY® SAFETY KIT #SL-WG	HC	3/4"					
	LC	3/4"					
BOLT-ON HARDWARE KIT #SGBS2	P_s	38"	46-1/2"	64"	72-1/2"	81-1/4"	98-1/2"
	HC	2"					
AMERISTAR LOCK/BOLT-ON HINGE KIT #SGBS2A	LC	2"					
	P_s	40-1/2"	49"	66-1/2"	75"	83-3/4"	101"
AMERISTAR LOCK/BOLT-ON HINGE KIT #SGBS2A	HC	2"					
	LC	5/8"					
P_s	39-1/8"	47-5/8"	65-1/8"	73-5/8"	82-3/8"	99-5/8"	
P_s (Gate Post Spacing (Inside-To-Inside) for Single Gate = HC (Hinge Clearance) + W (Out-To-Out Gate Width) + LC (Latch Clearance)							

HARDWARE KITS & POST INTERSPACES FOR MONTAGE & MONTAGE ATF <u>DOUBLE SWING</u> WELDED STEEL GATES							
NOMINAL GATE OPENING	6'	8'	10'	12'	14'	16'	
W = LEAF WIDTH	36-1/2"	45"	62-1/2"	71"	79-3/4"	96-1/2"	
BOLT-ON HARDWARE KIT #SGBD2	HC	2"					
	LC	2"					
P_d	79"	96"	131"	148"	165-1/2"	200"	
P_d (Gate Post Spacing (Inside-To-Inside) for Double Gate = 2 x HC (Hinge Clearance) + 2 x W (Out-To-Out Gate Width) + LC (Latch Clearance)							