

WELDED GATES


GATE SPECIFICATIONS

STANDARD

Gate Ends: 1-3/4" (14 Ga.) Steel
 Rails: 1-7/16" x 1-1/2" (14 Ga.)
 Pickets: 3/4" (16 Ga.) For 3' Tall to 6' Tall
 3/4" (14 Ga.) For 7' Tall and 8' Tall

All component intersections are welded for greater strength

GATE DRAWING DIMENSIONAL FORMAT

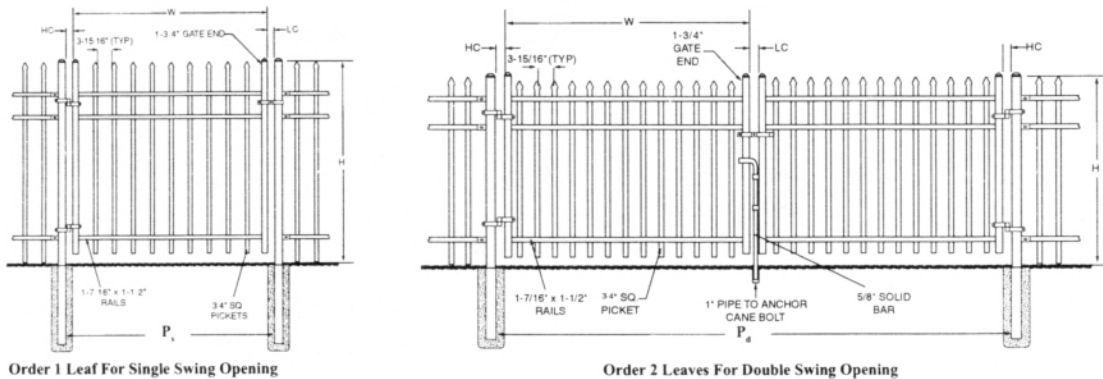

W = Outside To Outside Width of Finished Gate Leaf

H = Height; HC = Hinge Clearance; LC = Latch Clearance;

P_s = Gate Post Spacing (Inside-To-Inside) for Single Gate; P_d = Gate Post Spacing (Inside-To-Inside) for Double Gate

HARDWARE KITS & POST INTERSPACES FOR MONTAGE PLUS SINGLE SWING WELDED STEEL GATES						
NOMINAL GATE OPENING	3-1/2'	4'	5'	6'	7'	8'
W = LEAF WIDTH	40"	49-1/2"	58-3/4"	68"	86-3/4"	95-1/2"
FORK LATCH/BOX HINGE KITS #SGBSX25 OR #SGBSX3	HC	2"				
	LC	2"				
	P _s	44"	53-1/2"	62-3/4"	72"	90-3/4"
AMERISTAR LOCK/BOX HINGE KIT #SGBSXA	HC	2"				
	LC	5/8"				
	P _s	42-5/8"	52-1/8"	61-3/8"	70-5/8"	89-3/8"
POOL, PET & PLAY [®] SAFETY KIT #SL-WG	HC	3/4"				
	LC	3/4"				
	P _s	41-1/2"	51"	60-1/4"	69-1/2"	88-1/4"
FORK LATCH / 180° HINGE KIT #SGBS133	HC	2-3/8"				
	LC	2"				
	P _s	44-3/8"	53-7/8"	63-1/8"	72-3/8"	91-1/8"
AMERISTAR LOCK / 180° HINGE KIT #UGBS13A, UGBS14A OR UGBS16A	HC	2-3/8"				
	LC	5/8"				
	P _s	43"	52-1/2"	61-3/4"	71"	89-3/4"
P _s (Gate Post Spacing (Inside-To-Inside) for Single Gate = HC (Hinge Clearance) + W (Out-To-Out Gate Width) + LC (Latch Clearance)						

HARDWARE KITS & POST INTERSPACES FOR MONTAGE PLUS DOUBLE SWING WELDED STEEL GATES						
NOMINAL GATE OPENING	7'	8'	10'	12'	14'	16'
W = LEAF WIDTH	40"	49-1/2"	58-3/4"	68"	86-3/4"	95-1/2"
FORK LATCH / BOX HINGE KIT #SGBDX	HC	2"				
	LC	2"				
	P _s	86"	105"	123-1/2"	142"	179-1/2"
DOUBLE DRIVE LATCH / 180° HINGE KIT #UGBD14 OR #UGBD16	HC	2-3/8"				
	LC	3"				
	P _s	87-3/4"	106-3/4"	125-1/4"	143-3/4"	181-3/4"
P _d (Gate Post Spacing (Inside-To-Inside) for Double Gate = 2 x HC (Hinge Clearance) + 2 x W (Out-To-Out Gate Width) + LC (Latch Clearance)						