

DEx10 DEx20/21 DEx30 DEx40 DEx50/51

Delayed Egress

The DE EasyKits provide a secure 2-point locking system with 15-second delay and 100dB alarm when someone attempts to exit. The DE EasyKit is ideal for retail stores, healthcare, assisted-living facilities, childcare, sports arenas and any location where a special locking delayed exit is required to prevent theft or to protect those trying to exit.



(Shown with 10 Series Rim Exit Device - Available with 10/40 Rim, 30 Mortise and 20/21/50/51 Surface Vertical Rod Devices)

Benefits -

- Best-in-class components provide for fast, easy installation
- All hardware items provided with one easy-to-order, easy-to-specify part number
- Controls foot traffic, deters unauthorized exits, reduces employee and customer theft while providing a life safety, codecompliant application
- Key switch with LED's and horn are mounted on the wall, protecting the electronics from swinging into the weather

Features -

- Configured Delayed Egress
 EasyKit includes all hardware,
 instructions, riser illustration and point-to-point wiring diagram
- Factory-programmed, pre-wired delayed egress controller / power supply
- Advantex panic device has stainless steel deadlocking Pullman-type latch bolt
- 100dB Alarm

- Form C, momentary key switch with green and red LEDs, arms, disarms and resets system
- Code-compliant delayed egress signage
- Hardware is non-handed (10/40) or reversible
- Fire Alarm override connected at controller / power supply

- Remote bypass and signaling options available
- Heavy-duty angled end cap deflects damage away from panic device
- Available in various configurations, for single and paired openings
- Easily add various access control options with or without an antitailgating option

Mechanical Options -

- F 3 Hour Fire Rated
- · H Hurricane Rated
- CD Cylinder Dogging
- LD Less Dogging
- 36 Fits 36" Door Width (Std.)
- 48 Fits 48" Door Width
- 99 Surface Strike
- 98 Semi Mortise Strike

Electrical Options -

- 1 to 3 second adjustable nuisance alarm
- 120 Volt in/24 Volt out (Std.)
- Also available 277 Volt and 240 Volt



Accessories -

- SN1 Sex Nut Fasteners
- · SSK Torx Security Screw Kit
- · GB Glass Bead Kits

Technical Information -


- · Door Types Wood, Hollow Metal, Fiberglass or Aluminum
- Minimum Stile Advantex 10, 20 Series: 4-5/8" with surface strike or 4-1/8" with optional semi-mortise
- Minimum Stile Advantex 40, 50 Series: 2" with standard semimortise strike or 2-1/2" with optional surface strike

Finishes -

605 / US3 **Polished Brass** 606 / US4 **Brushed Brass** 611 / US9 Polished Bronze 612 / US10 Brushed Bronze 613 / US10B Oil Rubbed Bronze 629 / US32 Polished Stainless Steel


630 / US32D Brushed Stainless Steel

Dimensions - (10 Series Shown)



Riser Diagram -

Delayed Egress

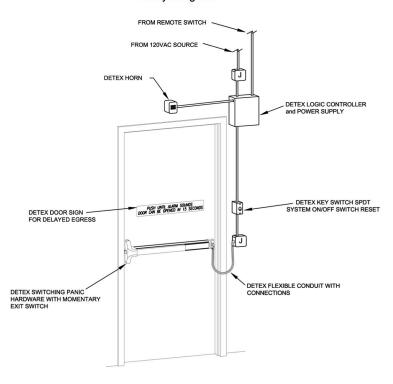

Listings and Approvals -Advantex



UL Listed Panic Hardware

UL Listed Fire Exit Hardware



for 3 hours, maximum 4'x10' single doors and pairs of 4'x8' with F90KR keyed removable Mullion



Meets ADA requirements



UBC 97. Standard 7-2 and UL10C for positive pressure



ANSI/BHMA certified A156.3



Meets NFPA 80 & 101

for Life Safety

Miami-Dade County, Florida

10/40 Series Only



California State Fire Marshall -4140-0127:105

NOA 04-0810.04 EXP. 04/07/10

Detex Limited Warranty -

Advantex - 10 Year Mechanical / 3 Year Electrical Manufacturers **Limited Warranty**



302 Detex Drive New Braunfels, Texas 78130-3045 USA PH. (830) 629-2900 (800) 729-3839

Detex Corporation

FAX (830) 620-6711

(800) 653-3839

http://www.detex.com

USA Sales:

marketing@detex.com International Sales: export@detex.com