

CertainTeed  
*Bufftech*<sup>®</sup>  
Vinyl Fence Products

Product Reference Guide



1665 – 2015


**CertainTeed**  
SAINT-GOBAIN

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Privacy

**Galveston**  
**CertaGrain® Texture**

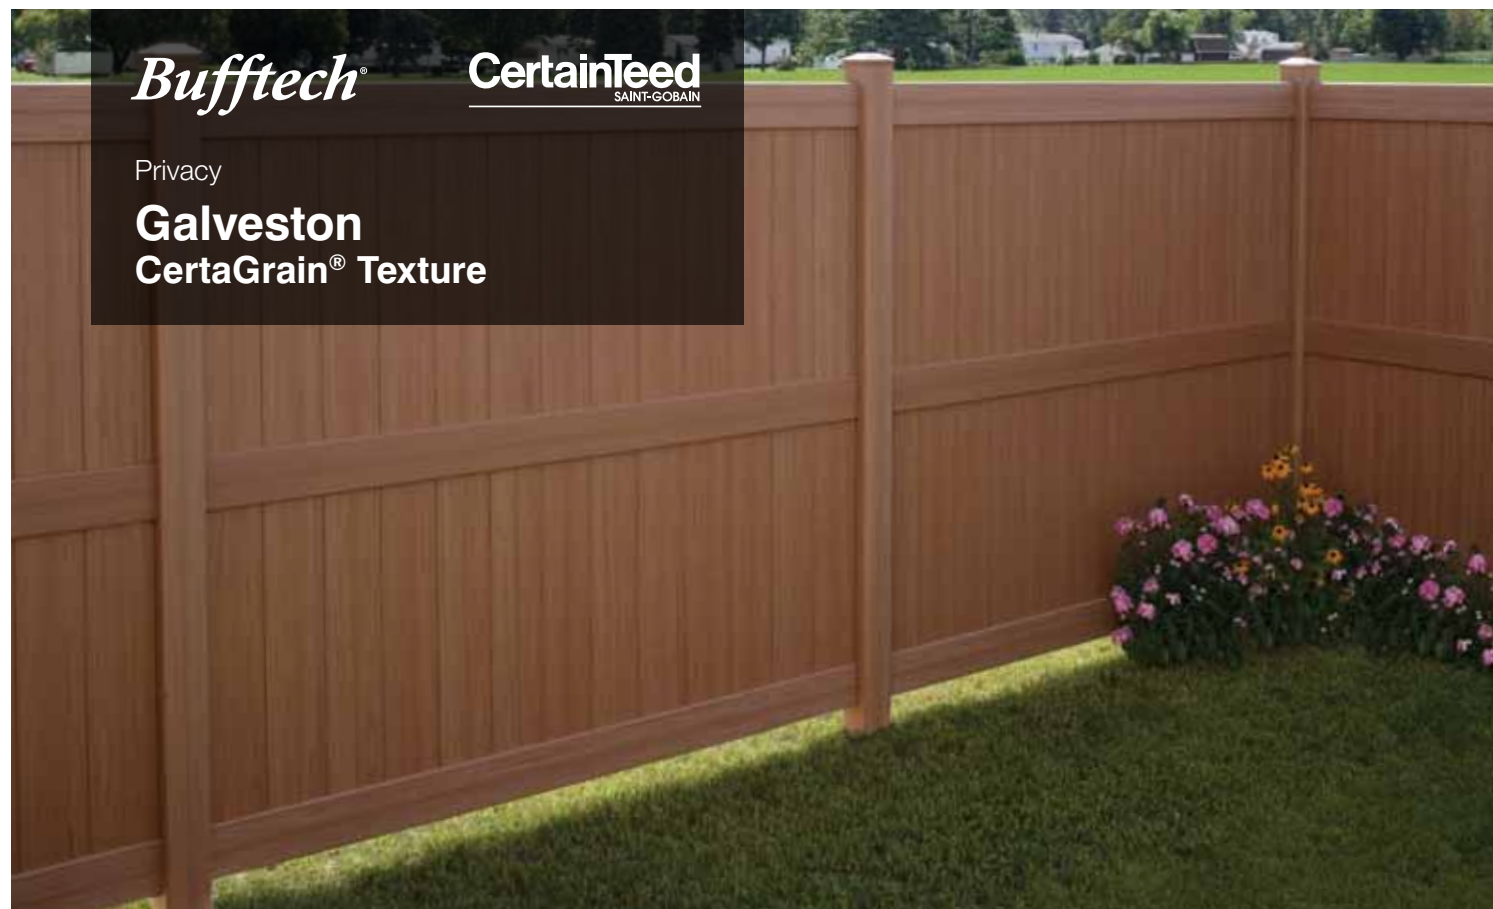

## Galveston CertaGrain® Texture Specifications & Color Availability



Height	7', 8'
Racking	5°*
Post Size	5" x 5"
Posts – Wall Thickness	0.170"
Post Centers	8'
Section Width	96"
Pickets – Wall Thickness	0.060"
Metal Rail Reinforcement	Top, Middle, Bottom
Rails	2" x 6" Channeled x 95" (Top/Bottom) 2" x 6" x 95" (Midrail)
Top Rail Wall Thickness	0.090"
Midrail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	CertaGrain®
Accessories	Decorative Caps, Solar Caps
Performance	ColorLast®
End Channels	Yes**
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Accents will reduce the amount of racking

\*\*End channels required on privacy ColorLast colors

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Privacy

## Galveston Smooth Finish



## Galveston Smooth Finish Specifications & Color Availability

White

Almond

### Decorative Accents

Galveston with Victorian Accent

Colors: White & Almond

Galveston with Lattice Accent

Colors: White & Almond


Height	7', 8'
Racking	5°*
Post Size	5" x 5"
Posts – Wall Thickness	0.170"
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 7", Tongue & Groove
Pickets – Wall Thickness	0.060"
Metal Rail Reinforcement	Top, Middle, Bottom
Rails	2" x 6" Deco x 95" (Top/Bottom) 2" x 6" x 95" (Midrail)
Top Rail Wall Thickness	0.090"
Midrail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	Smooth
Decorative Accents	Lattice, Victorian
Accessories	Decorative Caps, Solar Caps
End Channels	Yes
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Accents will reduce the amount of racking



**Bufftech®****CertainTeed**  
SAINT-GOBAIN

Privacy

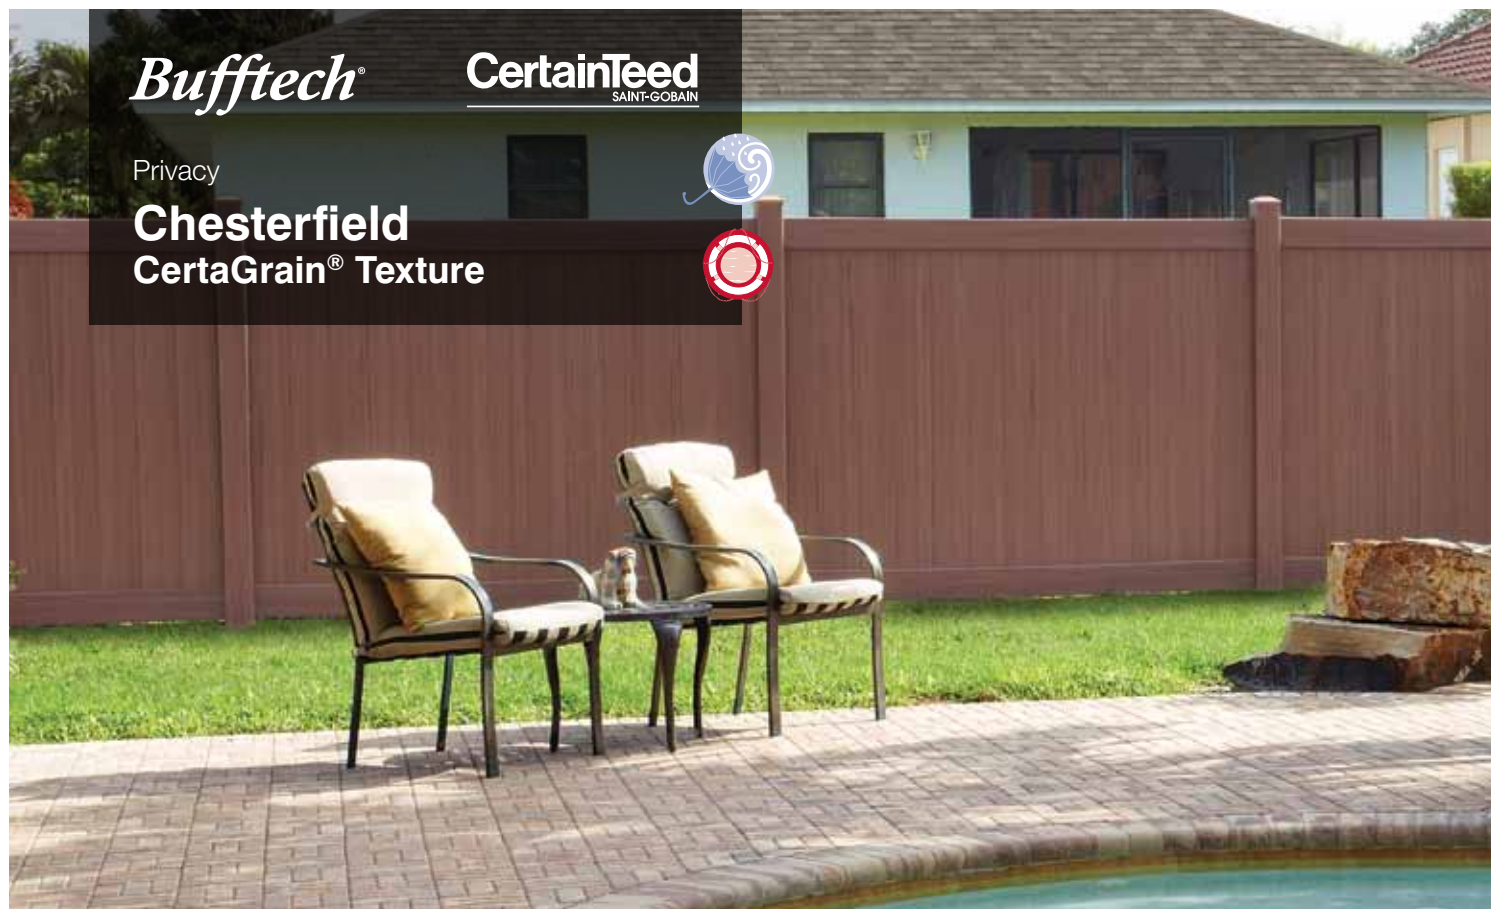**Chesterfield**  
**CertaGrain® Texture****Chesterfield CertaGrain® Texture**  
**Specifications & Color Availability****Decorative Accents**

Chesterfield with Concave, Convex, S Curve and Swoop

Colors: Weathered Blend, Arctic Blend, Brazilian Blend &amp; Sierra Blend

Chesterfield with Victorian Accent

Colors: White, Almond, Natural Clay, Weathered Blend, Arctic Blend, Brazilian Blend &amp; Sierra Blend

Chesterfield with Lattice Accent

Colors: White &amp; Natural Clay

**Decorative Gates**

Chesterfield Concave and Convex Gates

Color: Weathered Blend, Arctic Blend, Brazilian Blend &amp; Sierra Blend

Height	4', 5', 6'
Racking	10°*
Post Size	5" x 5"
Posts – Wall Thickness	0.170"
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 7", Tongue & Groove
Pickets – Wall Thickness	0.060"
Metal Rail Reinforcement	Bottom**
Rails	2" x 6" Channeled x 95"
Top Rail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	CertaGrain®
Decorative Accents	Lattice, Victorian, Concave, Convex, S Curve, Swoop, Decorative Gates
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code, WindZone™, ColorLast®
End Channels	Yes***
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Accents will reduce the amount of racking

\*\*Reinforced top rail for ColorLast colors

\*\*\*End channels required on privacy ColorLast colors



ColorLast fade protection



Meets pool code



WindZone performance




**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Privacy

**Chesterfield  
Smooth Finish**

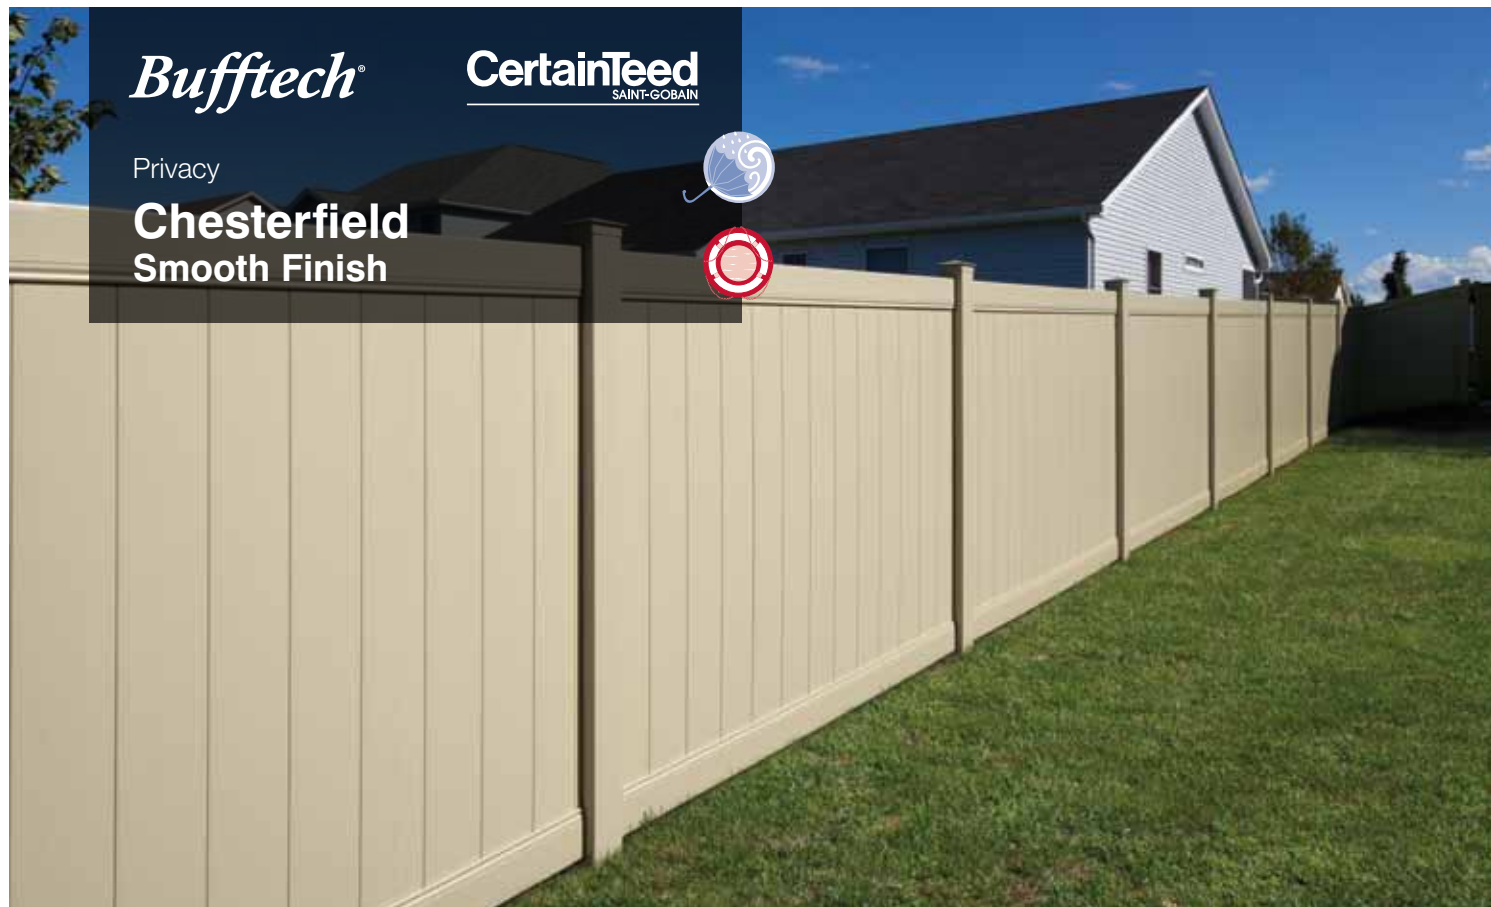

## Chesterfield Smooth Finish Specifications & Color Availability

White

Almond

Natural  
Clay



### Decorative Accents

Chesterfield with S Curve and Swoop

Colors: White & Almond

Chesterfield with Lattice Accent

Colors: White & Almond

Chesterfield with Victorian Accent

Colors: White & Almond

Chesterfield with Huntington Accent

Colors: White & Almond

Chesterfield with Westminster Accent

Colors: White

### Decorative Gates

Chesterfield Concave and Convex Gates

Color: White

Height	4', 5', 6'
Racking	10°
Post Size	5" x 5"
Posts – Wall Thickness	0.135 (4'), 0.170" (5' & 6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 7", Tongue & Groove
Pickets – Wall Thickness	0.060"
Metal Rail Reinforcement	Bottom**
Rails	2" x 6" Deco x 95"
Top Rail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	Smooth
Decorative Accents	Lattice, Victorian, Huntington, Westminster, Concave, Convex, S Curve, Swoop, Decorative Gates
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code, WindZone™, ColorLast®
End Channels	Yes***
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Accents will reduce the amount of racking

\*\*Reinforced top rail for ColorLast colors

\*\*\*End channels required on privacy ColorLast colors



ColorLast fade protection



Meets pool code



WindZone performance

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Privacy

**Chesterfield**  
**CertaStucco™ Texture**



## Chesterfield CertaStucco™ Texture Specifications & Color Availability

Mission  
Ivory

Almond

Height	4', 5', 6'
Racking	10°
Post Size	5" x 5"
Posts – Wall Thickness	0.170"
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 7", Tongue & Groove
Pickets – Wall Thickness	0.060"
Metal Rail Reinforcement	Bottom
Rails	2" x 6" Channeled x 95"
Top Rail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	CertaStucco™
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code, WindZone™
End Channels	Yes
Lifetime limited transferable warranty with 5-year SureStart™	Yes

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Privacy

## New Lexington Smooth Finish



## New Lexington Smooth Finish Specifications & Color Availability

White

Almond

### Decorative Accents

New Lexington with S Curve and Swoop

Colors: White & Almond

New Lexington with Lattice Accent

Colors: White & Almond

New Lexington with Victorian Accent

Colors: White & Almond

Height	4', 5', 6'
Racking	7°*
Post Size	5" x 5"
Posts – Wall Thickness	0.135"
Post Centers	8'
Section Width	96"
Picket Size	5/8" x 11-3/8", Tongue & Groove
Pickets – Wall Thickness	0.050"
Metal Rail Reinforcement	Bottom
Rails	1-1/2" x 5-1/2" Deco x 95"
Top Rail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	Smooth
Decorative Accents	Lattice, Victorian, S Curve, Swoop
Accessories	Decorative Caps, Solar Caps
End Channels	Yes**
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Accents will reduce the amount of racking

\*\*End channels required on Almond color



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Semi-Private

## Imperial Select Cedar Texture



### Imperial Select Cedar Texture Specifications & Color Availability



Height	4', 5', 6' (5' & 6' include Midrail)
Racking	10° (4'), 5° (5' & 6')
Post Size	4" x 4" (4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (4'), 0.170" (5' & 6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 3"
Pickets – Wall Thickness	0.060"
Picket Spacing	7/16"
Metal Rail Reinforcement	Bottom*
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Select Cedar
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code, WindZone™, ColorLast®
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Reinforced top rail for ColorLast colors



ColorLast fade protection



Meets pool code




WindZone performance

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Semi-Private

**Imperial  
Smooth Finish**

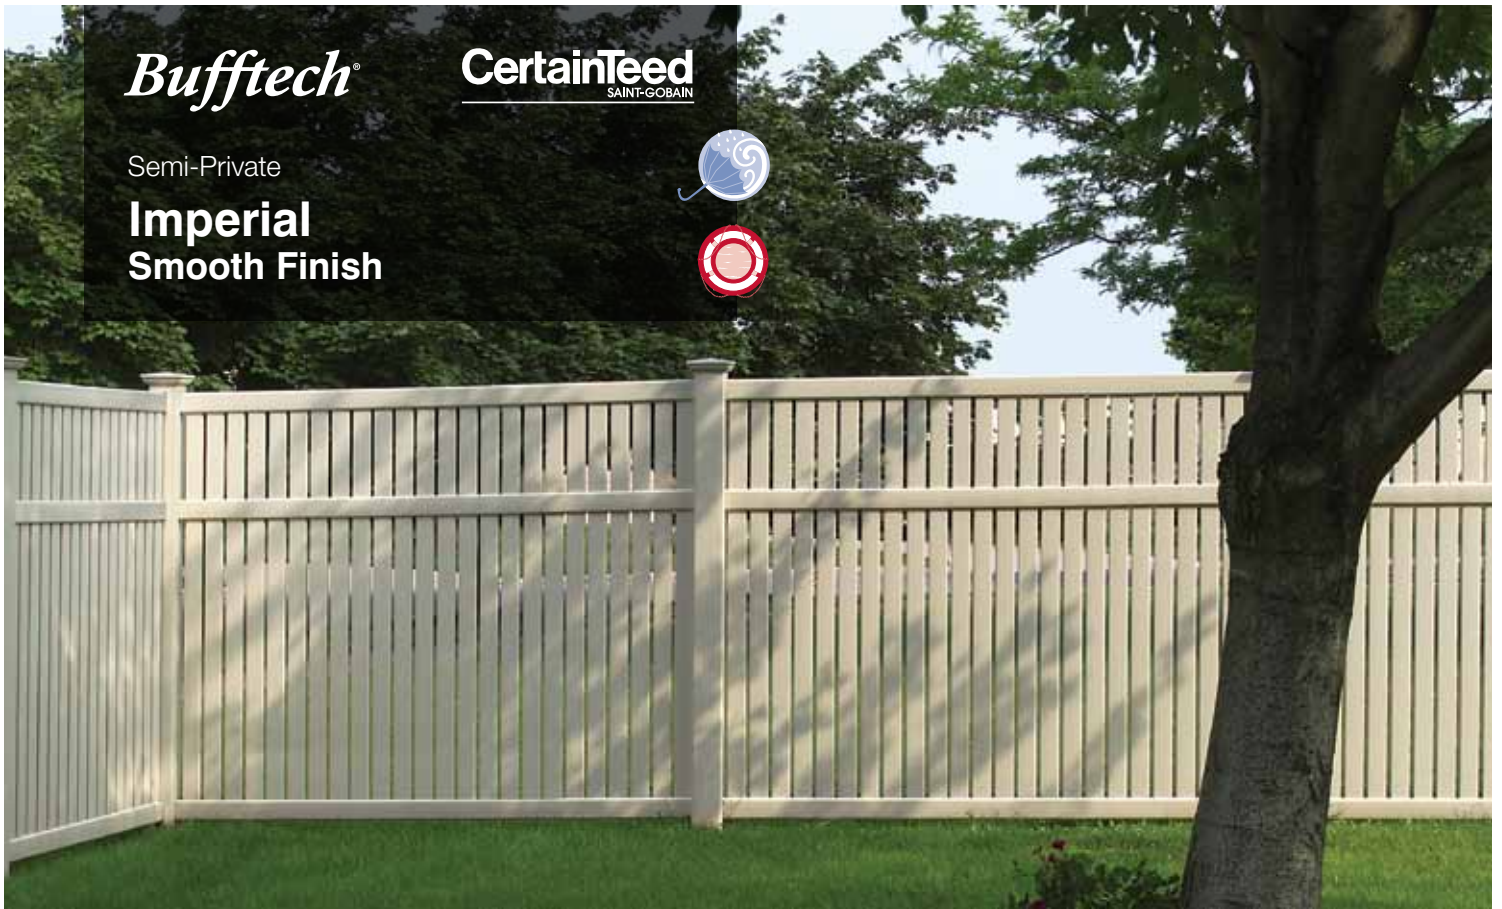

## Imperial Smooth Finish Specifications & Color Availability

White

Almond

Natural  
Clay



Height	3', 4', 5', 6' (5' & 6' include Midrail)
Racking	10° (3' & 4'), 5° (5' & 6')
Post Size	4" x 4" (3' & 4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (3' & 4'), 0.135" (5'), 0.170" (6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 3"
Pickets – Wall Thickness	0.060"
Picket Spacing	7/16"
Metal Rail Reinforcement	Bottom*
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code, WindZone™, ColorLast®
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Reinforced top rail for ColorLast colors



ColorLast fade protection



Meets pool code



WindZone performance



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Semi-Private

**Columbia**  
**Smooth Finish**



## Columbia Smooth Finish Specifications & Color Availability

White

### Decorative Accents

Columbia with Lattice Accent

Colors: White

Height	5', 6'
Racking	5°
Post Size	5" x 5"
Posts – Wall Thickness	0.170" (5' & 6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 6" Ribbed
Pickets – Wall Thickness	0.060"
Picket Spacing	4-9/16"
Metal Rail Reinforcement	Bottom
Rails	3-1/2" x 3-1/2" x 94"
Top Rail Wall Thickness	0.115"
Midrail Wall Thickness	0.115"
Bottom Rail Wall Thickness	0.115"
Texture	Smooth
Decorative Accents	Lattice
Accessories	Decorative Caps, Solar Caps
Performance	WindZone™
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Semi-Private

**Millbrook  
Smooth Finish**



## Millbrook Smooth Finish Specifications & Color Availability

White

Almond

Height	5', 6'
Racking	5°
Post Size	5" x 5"
Posts – Wall Thickness	0.135" (5'), 0.170" (6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 6" Ribbed
Pickets – Wall Thickness	0.060"
Picket Spacing	13/16"
Metal Rail Reinforcement	Bottom
Rails	2" x 6" x 94" (Top/Bottom) 1-3/4" x 3-1/2" x 94" (Midrail)
Top Rail Wall Thickness	0.090"
Midrail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Contemporary

## Baron Select Cedar Texture



### Baron Select Cedar Texture Specifications & Color Availability



Height	4', 5', 6' (5' & 6' include Midrail)
Racking	10° (4'), 5° (5' & 6')
Post Size	4" x 4" (4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (4'), 0.170" (5' & 6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 3"
Pickets – Wall Thickness	0.060"
Picket Spacing	2-15/16"
Metal Rail Reinforcement	Bottom*
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Select Cedar
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code, ColorLast®
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Reinforced top rail for ColorLast colors

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Contemporary

**Baron**  
**Smooth Finish**



## Baron Smooth Finish Specifications & Color Availability

White

Almond

Natural  
Clay



Height	3', 4', 5', 6' (5' & 6' include Midrail)
Racking	10° (3' & 4'), 5° (5' & 6')
Post Size	4" x 4" (3' & 4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (3' & 4'), 0.135" (5'), 0.170" (6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 3"
Pickets – Wall Thickness	0.060"
Picket Spacing	2-15/16"
Metal Rail Reinforcement	Bottom*
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code, ColorLast®
Lifetime limited transferable warranty with 5-year SureStart™	Yes

\*Reinforced top rail for ColorLast colors



ColorLast fade protection



Meets pool code



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Contemporary

**Princeton  
Smooth Finish**



## Princeton Smooth Finish Specifications & Color Availability

White

Almond

Height	3', 4', 5', 6' (5' & 6' include Midrail)
Racking	10° (3' & 4'), 5° (5' & 6')
Post Size	4" x 4" (3' & 4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (3' & 4'), 0.135" (5'), 0.170" (6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 1-1/2"
Pickets – Wall Thickness	0.060"
Picket Spacing	1-3/4"
Metal Rail Reinforcement	Bottom
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Contemporary

**Countess**  
**Smooth Finish**



## Countess Smooth Finish Specifications & Color Availability

White

Almond

Height	3', 4', 5', 6' (5' & 6' include Midrail)
Racking	10° (3' & 4'), 5° (5' & 6')
Post Size	4" x 4" (3' & 4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (3' & 4'), 0.135" (5'), 0.170" (6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 1-1/2"
Pickets – Wall Thickness	0.060"
Picket Spacing	2-5/16"
Metal Rail Reinforcement	Bottom
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Contemporary

**Monarch**  
**Smooth Finish**



## Monarch Smooth Finish Specifications & Color Availability

White

Almond

Height	3', 4', 5', 6' (5' & 6' include midrail)
Racking	10° (3' & 4'), 5° (5' & 6')
Post Size	4" x 4" (3' & 4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (3' & 4'), 0.135" (5'), 0.170" (6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 1-1/2" 7/8" x 3"
Pickets – Wall Thickness	0.060"
Picket Spacing	3"
Metal Rail Reinforcement	Bottom
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Performance	Pool Code
Lifetime limited transferable warranty with 5-year SureStart™	Yes





Victorian Smooth Finish  
Specifications & Color Availability

White

Almond

Height	3', 4', 5', 6' (5' & 6' include midrail)
Racking	10° (3' & 4'), 5° (5' & 6')
Post Size	4" x 4" (3' & 4'), 5" x 5" (5' & 6')
Posts – Wall Thickness	0.140" (3' & 4'), 0.135" (5'), 0.170" (6')
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 1-1/2"
Pickets – Wall Thickness	0.060"
Picket Spacing	3-5/8"
Metal Rail Reinforcement	Bottom
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Midrail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Classic

## Manchester Straight/Concave Smooth Finish



### Manchester Straight/Concave Smooth Finish Specifications & Color Availability

White

Almond

#### Decorative Accents

Manchester with Classic Impressions™ Posts

Recessed – design on all four sides

Fluted – design on two sides

Colors: White

Height	3', 4'
Racking	5°
Post Size	5" x 5"
Posts – Wall Thickness	0.135"
Post Centers	8'
Section Width	96"
Picket Size	1-1/2" x 1-1/2", Square
Pickets – Wall Thickness	0.060"
Picket Spacing	1-9/16"
Metal Rail Reinforcement	Bottom
Rails	2" x 6" x 94" (Bottom) 2" x 3-1/2" x 94" (Top)
Top Rail Wall Thickness	0.120"
Bottom Rail Wall Thickness	0.090"
Texture	Smooth
Decorative Accents	Classic Impressions™ Posts
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Classic

## Canterbury Straight/Swoop Smooth Finish



### Canterbury Straight/Swoop Smooth Finish Specifications & Color Availability

White

Height	3', 4'
Racking	5°
Post Size	5" x 5"
Posts – Wall Thickness	0.135"
Post Centers	8'
Section Width	96"
Picket Size	1-1/2" x 1-1/2", Square
Pickets – Wall Thickness	0.060"
Picket Spacing	1-9/16"
Metal Rail Reinforcement	Bottom
Rails	2" x 6" x 94" (Bottom) 2" x 3-1/2" x 94" (Top/Midrail)
Top Rail Wall Thickness	0.120"
Bottom Rail Wall Thickness	0.090"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Traditional

**Danbury  
Straight/Concave  
Select Cedar Texture**



## Danbury Straight/Concave Select Cedar Texture Specifications & Color Availability



Height	4'
Racking	5°
Post Size	4" x 4"
Posts – Wall Thickness	0.140"
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 3", Pointed
Pickets – Wall Thickness	0.060"
Picket Spacing	2-15/16"
Metal Rail Reinforcement	Bottom
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Select Cedar
Accessories	Decorative Caps, Solar Caps
Performance	ColorLast®
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Danbury Straight/Concave  
Smooth Finish**  
**Specifications & Color Availability**

White

Almond

Natural Clay

Height	4'
Racking	5°
Post Size	4" x 4"
Posts – Wall Thickness	0.140"
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 3", Pointed
Pickets – Wall Thickness	0.060"
Picket Spacing	2-15/16"
Metal Rail Reinforcement	Bottom
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Performance	ColorLast®
Lifetime limited transferable warranty with 5-year SureStart™	Yes

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Traditional

**Rothbury  
Straight/Concave  
Smooth Finish**



## Rothbury Straight/Concave Smooth Finish Specifications & Color Availability

White

Almond

Height	4'
Racking	5°
Post Size	4" x 4"
Posts – Wall Thickness	0.140"
Post Centers	8'
Section Width	96"
Picket Size	7/8" x 3", Dog Ear
Pickets – Wall Thickness	0.060"
Picket Spacing	2-15/16"
Metal Rail Reinforcement	Bottom
Rails	1-3/4" x 3-1/2" x 96"
Top Rail Wall Thickness	0.095"
Bottom Rail Wall Thickness	0.095"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Traditional

**Cape Cod  
Straight/Concave  
Smooth Finish**



## Cape Cod Straight/Concave Smooth Finish Specifications & Color Availability

White

Height	3', 4', 5'
Racking	15°
Post Size	4" x 4" (3' & 4'), 5" x 5" (5')
Posts – Wall Thickness	0.140" (3' & 4'), 0.135" (5')
Post Centers	6'
Section Width	72"
Picket Size	7/8" x 3", Pointed
Pickets – Wall Thickness	0.060"
Picket Spacing	2-7/16"
Metal Rail Reinforcement	None
Rails	1-3/4" x 3-1/2" x 72"
Top Rail Wall Thickness	0.110"
Bottom Rail Wall Thickness	0.110"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Traditional

**Yorkshire  
Straight/Concave  
Smooth Finish**



## Yorkshire Straight/Concave Smooth Finish Specifications & Color Availability

White

Height	3', 4'
Racking	15°
Post Size	4" x 4"
Posts – Wall Thickness	0.140"
Post Centers	6'
Section Width	72"
Picket Size	7/8" x 3", Dog Ear
Pickets – Wall Thickness	0.060"
Picket Spacing	2-7/16"
Metal Rail Reinforcement	None
Rails	1-3/4" x 3-1/2" x 72"
Top Rail Wall Thickness	0.110"
Bottom Rail Wall Thickness	0.110"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Post & Rail

**4-Rail, 3-Rail, 2-Rail  
CertaGrain® Texture**



## 4-Rail, 3-Rail, 2-Rail CertaGrain® Texture Specifications & Color Availability




Height	5'
Racking	5°
Post Size	5" x 5"
Posts – Wall Thickness	0.135"
Post Centers	8'
Section Width	96" (White), 72" (Blend Colors)
Metal Rail Reinforcement	None
Rails	1-1/2" x 5-1/2" Ribbed (White) 2" x 6" Ribbed (Blend Colors)
Rail Wall Thickness	0.090"
Texture	CertaGrain®
Accessories	Decorative Caps, Solar Caps
Performance	ColorLast®
Lifetime limited transferable warranty with 5-year SureStart™	Yes



ColorLast fade protection



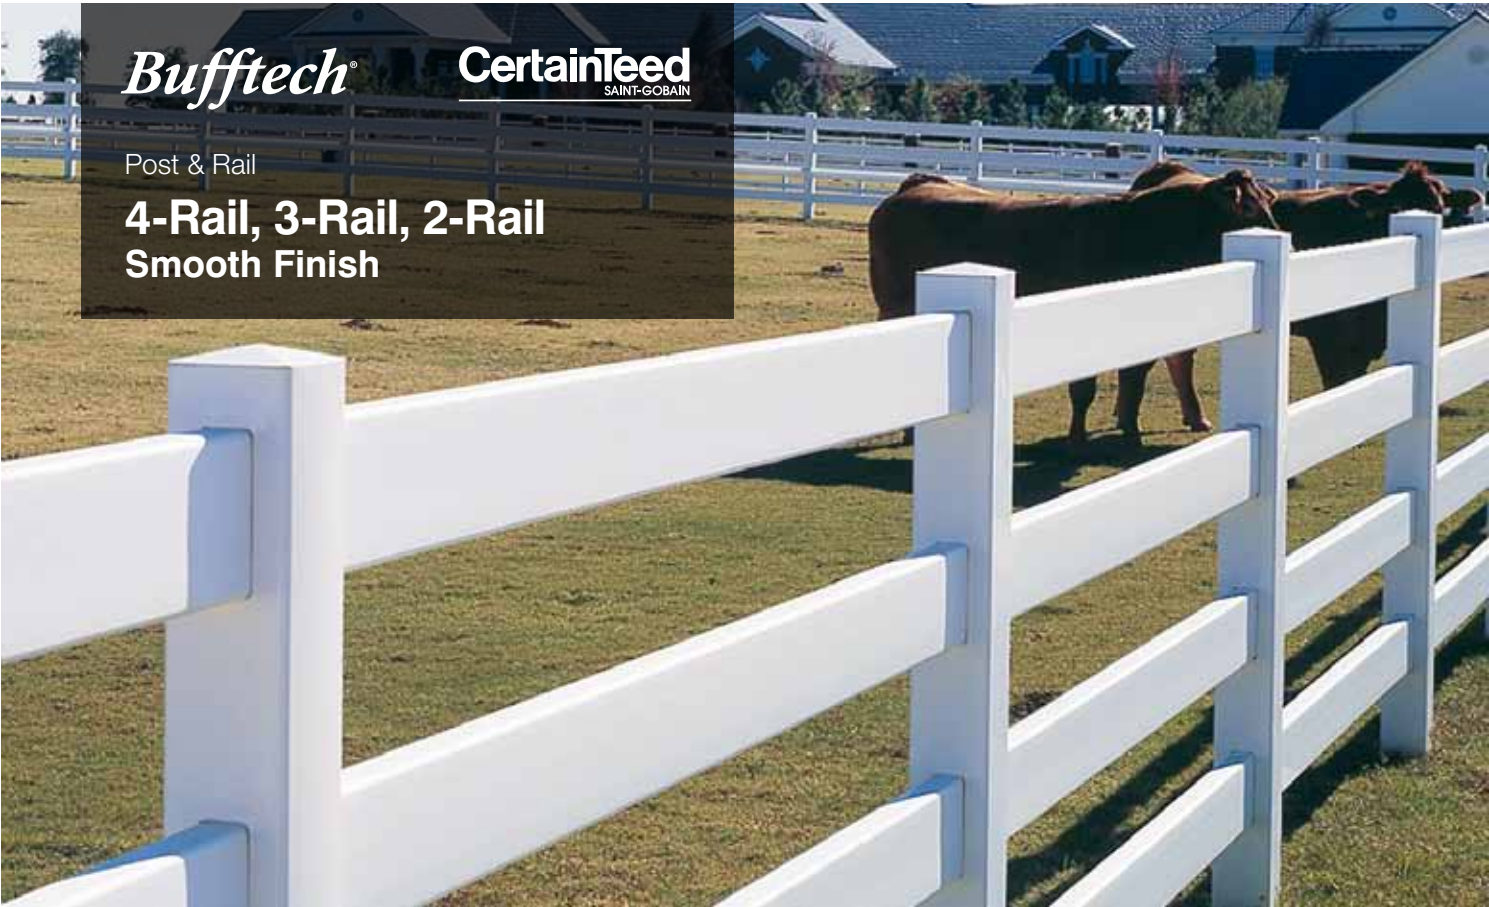

4-Rail, 3-Rail, 2-Rail Smooth Finish  
Specifications & Color Availability

White

Almond

Height	5'
Racking	5°
Post Size	5" x 5"
Posts – Wall Thickness	0.135"
Post Centers	8'
Section Width	96"
Metal Rail Reinforcement	None
Rails	1-1/2" x 5-1/2" Ribbed or 2" x 6" Ribbed
Rail Wall Thickness	0.090"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes

**Bufftech®**

**CertainTeed**  
SAINT-GOBAIN

Post & Rail

**Crossbuck  
Smooth Finish**



## Crossbuck Smooth Finish Specifications & Color Availability

White

Height	4'
Racking	5°
Post Size	5" x 5"
Posts – Wall Thickness	0.135"
Post Centers	8'
Section Width	96"
Metal Rail Reinforcement	None
Rails	1-1/2" x 5-1/2" Ribbed
Top Rail Wall Thickness	0.090"
Bottom Rail Wall Thickness	0.090"
Texture	Smooth
Accessories	Decorative Caps, Solar Caps
Lifetime limited transferable warranty with 5-year SureStart™	Yes



**Bufftech®****CertainTeed**  
SAINT-GOBAIN

## Gates



## Gates Specifications

	Pre-Assembled Gate Widths	Unassembled Gate Kit Maximum Width	Extension Kit Required**
Galveston	50-1/2"	50-1/2"	No
Chesterfield	36-1/2", 50-1/2", 64-3/4"	70"	Yes
Chesterfield Concave Accent	50-1/2"	N/A	N/A
Chesterfield Convex Accent	50-1/2"	N/A	N/A
New Lexington	42-1/2", 50-1/2", 65-1/4"	72"	Yes
Imperial	50"	72"	Yes
Columbia*	50"	50"	No
Millbrook	50"	60"	Yes
Baron	50"	72"	Yes
Princeton	50"	72"	Yes
Countess	50"	72"	Yes
Monarch	50"	72"	Yes
Victorian	50"	72"	Yes
Manchester	50"	50"	No
Manchester Concave	N/A	50"	No
Canterbury	50"	50"	No
Danbury	50"	50"	No
Cape Cod	50"	60"	Yes
Rothbury	50"	50"	No
Yorkshire	50"	60"	Yes
2-Rail*	N/A	72"	N/A
3-Rail*, 4-Rail*, Crossbuck*	N/A	96"	N/A

\*All gates are rackable, except Columbia, Post & Rail (2-Rail, 3-Rail and 4-Rail smooth finish), and Crossbuck styles.

\*\*For unassembled gate kits over 50" wide to achieve maximum width.

# Make a Smart Investment



Performance Features	Bufftech Vinyl
Lifetime limited warranty	✓
Transferable warranty	✓
Parts and 5-year labor warranty	✓
Dark color fade warranty	✓
Made in the USA	✓
Never needs painting or staining	✓
Won't chip, peel, crack or splinter	✓
Won't rot or support mold growth	✓
Impervious to termites/wood-boring insects	✓
Lead free	✓
No harmful chemicals	✓
High-quality raw materials	✓
Concealed fasteners	✓
Heavyweight pickets	✓
Wide choice of colors	✓
Woodgrain and stucco textures	✓
Steel reinforced rails	✓
Routed rails and posts	✓
Class A rating for flame spread	✓
Recycled content	✓
Self-extinguishing	✓
Easy to assemble	✓
Building code compliant	✓
Meets ASTM standards	✓



**Professional:** [facebook.com/CertainTeedFreedomofChoice](https://www.facebook.com/CertainTeedFreedomofChoice)  
**Consumer:** [facebook.com/CertainTeedLivingSpaces](https://www.facebook.com/CertainTeedLivingSpaces)

[ **Be Certain** ]

Confidence worth building on.™

## ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE  
 GYPSUM • CEILINGS • INSULATION

[www.certainteed.com](http://www.certainteed.com) <http://blog.certainteed.com>

CertainTeed Corporation  
 P.O. Box 860  
 Valley Forge, PA 19482

Professional: 800-233-8990  
 Consumer: 800-782-8777

## Quality Assurance

Bufftech fence products undergo rigorous testing to ensure they are manufactured to the highest standards and will withstand the test of time.

### Material

- Dimensional checks
- Wall thickness
- Cap stock thickness
- Color/gloss
- Impact
- Flex
- Tensile strength
- Accelerated weathering

### Design

#### Railing code approvals

- Kingston – CCRR-0211
- Oxford – CCRR-0187
- Panorama® – CCRR-0115

#### Fence certifications

- Kingston – CCRR-0211
- Oxford – CCRR-0187
- Panorama® – CCRR-0115
- Gates load tested for 300 lbs.
- ASTM E 90 Sound Transmission Loss Test
- STC 21 (applies to Chesterfield and Galveston)
- Miami-Dade county approved NOA#:12-1106.11 (expires 3-13-2018)

## Building Responsibly with Bufftech

CertainTeed is actively pursuing strategies to reduce our environmental impact, while increasing the sustainability of our operations and products. By carefully examining all environmental impacts throughout each phase of a product's life cycle—from raw materials and manufacturing, to transportation and use, to disposal and/or recycling—we gain a complete, accurate view of our product's true sustainability. CertainTeed has conducted a Life Cycle Assessment (LCA) and submitted the data to the National Institute of Standards and Technology (NIST) to be published in the building product LCA database, BEES (Building for Environmental and Economic Sustainability). The findings from this Life Cycle Assessment provide a new, if not surprising, vantage point from which to make more credible and confident decisions on environmentally sound vinyl fence options.



All Bufftech® products are GreenCircle Certified®, a third-party auditing process designed to assure builders, regulators and homeowners that Bufftech fence complies with our environmental and sustainability claims, including the recycled content of our product.



Backed by CertainTeed's exclusive **WindZone™** performance, Bufftech fence is engineered for use in high wind and hurricane conditions, as approved by Miami-Dade County NOA #12-1106.11\*. Recognized as the most stringent standards in the country, Miami-Dade test protocols include dynamic wind load testing up to 115 mph.



The Bufftech line also meets requirements of the ASTM and includes styles that **comply with local codes for swimming pool** applications. Check with your local building code official as local codes may vary.



CertainTeed guarantees the performance of Bufftech's darker colors and stain blends with our proprietary **ColorLast®** fade protection, a state-of-the-art acrylic formulation that provides superior protection from the harsh rays of the sun.



\*Miami-Dade County-approved NOA #12-1106.11, for exceptional performance in high wind conditions. To comply with WindZone performance, additional items are needed for installation. Please reference our product catalog. Expires 3/13/2018.