

Mail Chests - 4350

Newspaper Holder Installation Instructions

U.S.P.S. APPROVED


Installing Newspaper Holder under Mail Chest

Thank you for selecting Salsbury's 4350 mail chest. We are confident that the quality and construction of the mailbox will prove to be a good investment.

This instruction sheet is for installing the 4350 mail chest along with a 4315 newspaper holder. Other installation instructions are available for installing the mail chest on a standard post, installing the mail chest on spreaders, or installing the post in a concrete footing.

When you install a curbside or roadside mailbox, make sure that it is easily accessible to the mail carrier. By regulation it should be 41" to 45" from the ground or street surface up to the point of mail entry. The door should be set back 6" to 8" from the front face of the curb or the road edge. However, you should check with your local postmaster to ensure that the mailbox is installed according to local regulations.

The mail chest is fastened to the newspaper holder with four (4) 5/16" carriage bolts, washers, and nuts. The assembled mail chest and newspaper holder is then fastened to the standard post with the four (4) 5/16" hex washer head bolts included with the post.

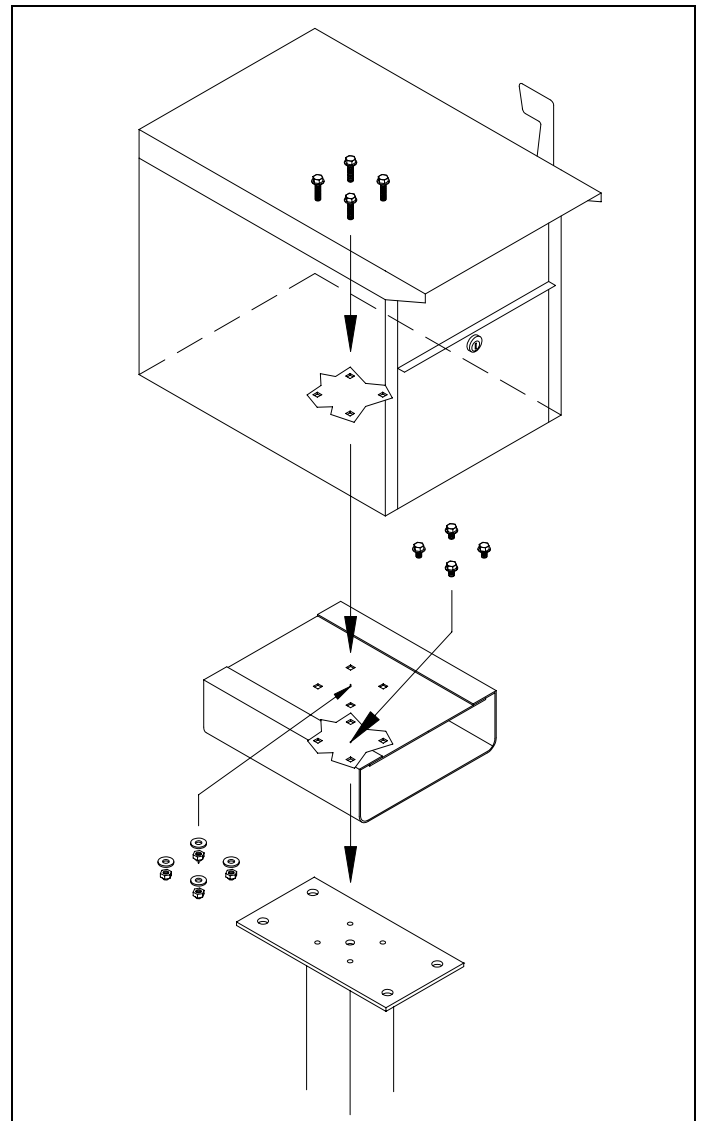

SALSBURY INDUSTRIES

1010 East 62nd Street, Los Angeles, CA 90001-1598
Phone: 1-800-624-5269 Int'l Phone: 323-846-6700
Fax: 1-800-624-5299 Int'l Fax: 323-846-6800
www.mailboxes.com engineering@mailboxes.com

Installation instructions are provided as general guidelines. It is advised that a professional installer be consulted. Salsbury Industries assumes no product assembly or installation liability.
Copyright © 2006 Salsbury Industries. All rights reserved.